


V-Pulleys

DIN2211

WITH LOCKING DEVICE



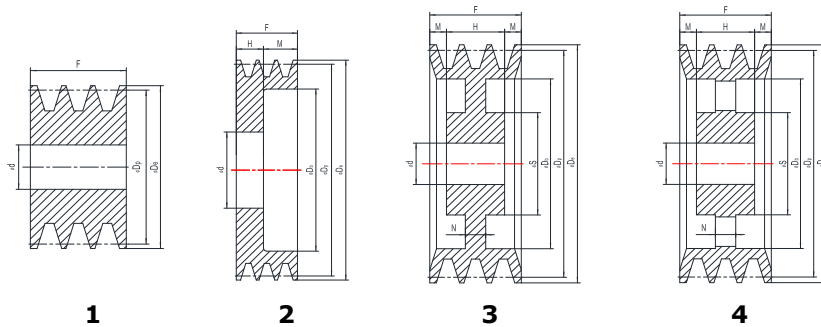

Pulley code explanation:

A90-1-55

A means: SPA type pulley


90 means: Pulley pitch 90mm

1 means: Groove 1

55 means: Pulley bore diameter

Pulley Code	Dp	De	Grooves	Form	** Ød H8			F	H	ØS	M	ØDb	N
					Ø55	Ø65	Ø80						
A90-1-55	90	95.5	1	1	55			20					
A90-2-55			2	1	55			35					
A90-3-55			3	1	55			50					
A90-4-55			4	1	55			65					
A90-5-55			5	1	55			80					
A95-1-55	95	100.5	1	1	55			20					
A95-2-55			2	1	55			35					
A95-3-55			3	1	55			50					
A95-4-55			4	1	55			65					
A95-5-55			5	1	55			80					
A100-1-55	100	105.5	1	1	55	65		20					
A100-2-55			2	1	55	65		35					
A100-3-55			3	1	55	65		50					
A100-4-55			4	1	55	65		65					
A100-5-55			5	1	55	65		80					
A112-1-55	112	110.5	1	1	55	65		20					
A112-2-55			2	2	55	65		35	27		8	79	
A112-3-55			3	2	55	65		50	27		23	79	
A112-4-55			4	2	55	65		65	27		38	79	
A112-5-55			5	3	55	65		80	27		26.5	79	27
A120-1-55	120	117.5	1	1	55	65	80	20					
A120-2-55			2	2	55	65	80	35	27		8	88	
A120-3-55			3	2	55	65	80	50	27		23	88	
A120-4-55			4	2	55	65	80	65	27		38	88	
A120-5-55			5	3	55	65	80	80	27		26.5	88	27
A130-1-55	130	135.5	1	1	55	65	80	20					
A130-2-55			2	2	55	65	80	35	27		8	97	
A130-3-55			3	2	55	65	80	50	27		23	97	
A130-4-55			4	2	55	65	80	65	27		38	97	
A130-5-55			5	3	55	65	80	80	27		26.5	97	27
A140-1-55	140	145.5	1	1	55	65	80	20					
A140-2-55			2	2	55	65	80	35	27		8	107	
A140-3-55			3	2	55	65	80	50	27		23	107	
A140-4-55			4	2	55	65	80	65	27		38	107	
A140-5-55			5	3	55	65	80	80	27		26.5	107	27
A150-1-55	150	155.5	1	1	55	65	80	20					
A150-2-55			2	2	55	65	80	35	27		8	117	
A150-3-55			3	2	55	65	80	50	27		23	117	
A150-4-55			4	2	55	65	80	65	27		38	117	
A150-5-55			5	3	55	65	80	80	27		26.5	117	27
A160-1-55	160	165.5	1	1	55	65	80	20					
A160-2-55			2	2	55	65	80	35	27		8	127	
A160-3-55			3	2	55	65	80	50	27		23	127	
A160-4-55			4	2	55	65	80	65	27		38	127	
A160-5-55			5	3	55	65	80	80	27		26.5	127	27
A170-1-55	170	175.5	1	1	55	65	80	20					
A170-2-55			2	3	55	65	80	35	27		4	137	27
A170-3-55			3	3	55	65	80	50	27		11.5	137	27
A170-4-55			4	3	55	65	80	65	27		19	137	27
A170-5-55			5	3	55	65	80	80	27		26.5	137	27
A180-1-55	180	185.5	1	1	55	65	80	20					
A180-2-55			2	3	55	65	80	35	27		4	147	27
A180-3-55			3	3	55	65	80	50	27		11.5	147	27
A180-4-55			4	3	55	65	80	65	27		19	147	27
A180-5-55			5	3	55	65	80	80	27		26.5	147	27

** = Pulley bore diameter (Seat for locking device)

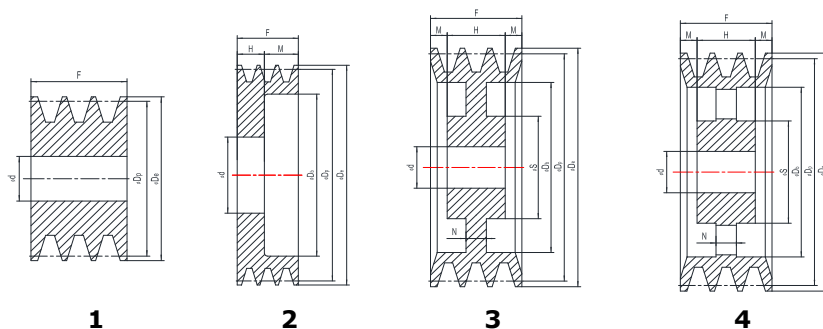

Pulley code explanation:

A190-2-**

A means: SPA type pulley


190 means: Pulley pitch 190mm

2 means: Grooves 2

** means: Pulley bore diameter

Pulley Code	Dp	De	Grooves	Form	** Ød H8			F	H	ØS	M	ØDb	N
					055	065	080						
A190-1-**	190	195.5	1	1	55	65	80	20					
A190-2-**			2	3	55	65	80	35	27	120	4	157	12
A190-3-**			3	3	55	65	80	50	27	120	11.5	157	12
A190-4-**			4	3	55	65	80	65	27	120	19	157	12
A190-5-**			5	3	55	65	80	80	27	120	26.5	157	12
A200-1-**	200	205.5	1	1	55	65	80	20					
A200-2-**			2	3	55	65	80	35	27	120	4	167	12
A200-3-**			3	3	55	65	80	50	27	120	11.5	167	14
A200-4-**			4	3	55	65	80	65	27	120	19	167	14
A200-5-**			5	3	55	65	80	80	27	120	26.5	167	14
A225-1-**	225	230.5	1	3	55	65	80	20	20	120			12
A225-2-**			2	3	55	65	80	35	27	120	4	192	12
A225-3-**			3	3	55	65	80	50	27	120	11.5	192	14
A225-4-**			4	3		65	80	65	27	120	19	192	14
A225-5-**			5	3		65	80	80	27	120	26.5	192	14
A250-1- **	250	255.5	1	4	55	65	80	20	20	130			14
A250-2- **			2	4	55	65	80	35	27	130	4	217	14
A250-3- **			3	4	55	65	80	50	27	130	11.5	217	14
A250-4- **			4	4		65	80	65	27	130	19	217	14
A250-5- **			5	4		65	80	80	27	130	26.5	217	14
A280-1- **	280	285.5	1	4	55	65	80	20	20	130			14
A280-2- **			2	4	55	65	80	35	27	130	4	247	14
A280-3- **			3	4	55	65	80	50	27	130	11.5	247	14
A280-4- **			4	4		65	80	65	27	130	19	247	14
A280-5- **			5	4		65	80	80	27	130	26.5	247	14
A300-1- **	300	305.5	1	4	55	65	80	20	20	130			14
A300-2- **			2	4	55	65	80	35	27	130	4	267	14
A300-3- **			3	4	55	65	80	50	27	130	11.5	267	14
A300-4- **			4	4		65	80	65	27	130	19	267	14
A300-5- **			5	4		65	80	80	27	130	26.5	267	14
A315-1- **	315	320.5	1	4	55	65	80	20	20	130			14
A315-2- **			2	4	55	65	80	35	27	130	4	282	14
A315-3- **			3	4	55	65	80	50	27	130	11.5	282	14
A315-4- **			4	4		65	80	65	27	130	19	282	14
A315-5- **			5	4		65	80	80	27	130	26.5	282	16
A355-1- **	355	360.5	1	4	55	65	80	20	20	130			14
A355-2- **			2	4	55	65	80	35	27	130	4	317	14
A355-3- **			3	4	55	65	80	50	27	130	11.5	317	14
A355-4- **			4	4		65	80	65	27	130	19	317	18
A355-5- **			5	4		65	80	80	27	130	26.5	317	20
A380-1- **	380	385.5	1	4		65	80	20	20	130			14
A380-2- **			2	4		65	80	35	27	130	4	347	14
A380-3- **			3	4		65	80	50	27	130	11.5	347	14
A380-4- **			4	4		65	80	65	27	130	19	347	18
A380-5- **			5	4		65	80	80	27	130	26.5	347	20
A400-1- **	400	405.5	1	4		65	80	20	20	130			14
A400-2- **			2	4		65	80	35	27	130	4	367	14
A400-3- **			3	4		65	80	50	27	130	11.5	367	16
A400-4- **			4	4		65	80	65	27	130	19	367	20
A400-5- **			5	4		65	80	80	27	130	26.5	367	24
A450-1- **	450	455.5	1	4		65	80	20	20	130			14
A450-2- **			2	4		65	80	35	27	130	4	417	14
A450-3- **			3	4		65	80	50	27	130	11.5	417	16
A450-4- **			4	4		65	80	65	27	130	19	417	20
A450-5- **			5	4		65	80	80	27	130	26.5	417	24

** = Pulley bore diameter (Seat for locking device)

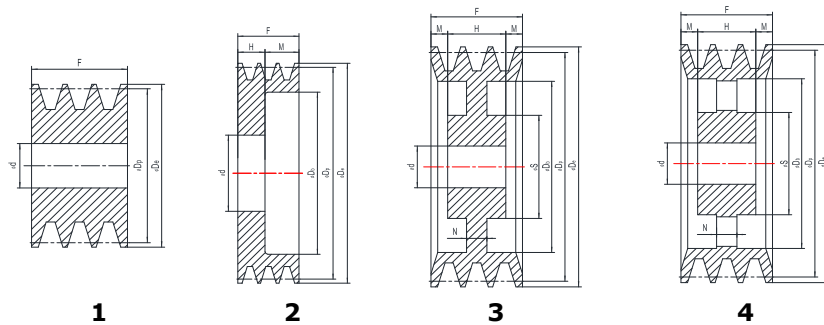

Pulley code explanation:

B90-3-55

B means: SPB type pulley


90 means: Pulley pitch 90mm

3 means: Grooves 3

55 means: Pulley bore diameter

Pulley Code	Dp	De	Grooves	Form	** Ød H8			F	H	ØS	M	ØDb	N
					Ø55	Ø65	Ø80						
B90-1-55	90	97	1	1	55			25					
B90-2-55			2	1	55			44	27				
B90-3-55			3	1	55			63	27				
B90-4-55			4	1	55			82	27				
B90-5-55			5	1	55			101	27				
B105-1-55	105	112	1	1	55			25					
B105-2-55			2	2	55			44	27		17	65	
B105-3-55			3	2	55			63	27		36	65	
B105-4-55			4	2	55			82	27		55	65	
B105-5-55			5	2	55			101	27		74	65	
B112-1-55	112	119	1	1	55			25					
B112-2-55			2	2	55			44	27		17	70	
B112-3-55			3	2	55			63	27		36	70	
B112-4-55			4	2	55			82	27		55	70	
B112-5-55			5	2	55			101	27		74	70	
B120-1-55	120	127	1	1	55	65		25					
B120-2-55			2	2	55	65		44	27		17	78	
B120-3-55			3	2	55	65		63	27		36	78	
B120-4-55			4	2	55	65		82	27		55	78	
B120-5-55			5	2	55	65		101	27		74	78	
B125-1-55	125	132	1	1	55	65		25					
B125-2-55			2	2	55	65		44	27		17	83	
B125-3-55			3	2	55	65		63	27		36	83	
B125-4-55			4	2	55	65		82	27		55	83	
B125-5-55			5	2	55	65		101	27		74	83	
B130-1-55	130	137	1	1	55	65	80	25					
B130-2-55			2	2	55	65	80	44	27		17	90	
B130-3-55			3	2	55	65	80	63	27		36	90	
B130-4-55			4	2	55	65	80	82	27		55	90	
B130-5-55			5	2	55	65	80	101	27		74	90	
B140-1-55	140	147	1	1	55	65	80	25					
B140-2-55			2	2	55	65	80	44	27		17	98	
B140-3-55			3	2	55	65	80	63	27		36	98	
B140-4-55			4	2	55	65	80	82	27		55	98	
B140-5-55			5	2	55	65	80	101	27		74	98	
B150-1-55	150	157	1	1	55	65	80	25					
B150-2-55			2	2	55	65	80	44	27		17	108	
B150-3-55			3	2	55	65	80	63	27		36	108	
B150-4-55			4	2	55	65	80	82	27		55	108	
B150-5-55			5	2	55	65	80	101	27		74	108	
B160-1-55	160	167	1	1	55	65	80	25					
B160-2-55			2	2	55	65	80	44	27		17	118	
B160-3-55			3	2	55	65	80	63	27		36	118	
B160-4-55			4	2	55	65	80	82	27		55	118	
B160-5-55			5	2	55	65	80	101	27		74	118	
B170-1-55	170	177	1	1	55	65	80	25					
B170-2-55			2	3	55	65	80	44	27		8.5	128	27
B170-3-55			3	3	55	65	80	63	27		18	128	27
B170-4-55			4	3	55	65	80	82	27		27.5	128	27
B170-5-55			5	3	55	65	80	101	27		37	128	27

** = Pulley bore diameter (Seat for locking device)

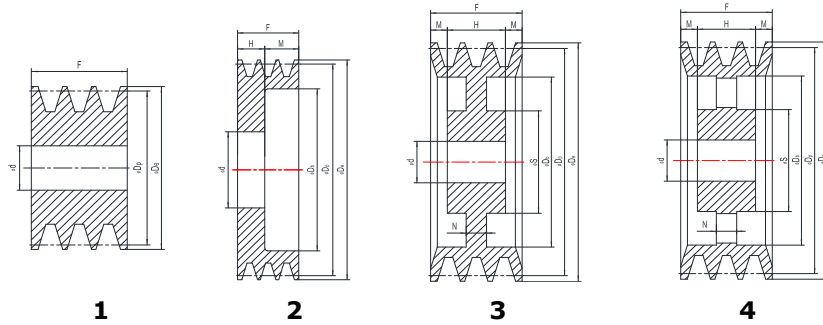

Pulley code explanation:

B180-4-**

B means: SPB type pulley


180 means: Pulley pitch 180mm

4 means: Grooves 4

** means: Pulley bore diameter

Pulley Code	Dp	De	Grooves	Form	** Ød H8			F	H	ØS	M	ØDb	N
					Ø55	Ø65	Ø80						
B180-1-**	180	187	1	1	55	65	80	25					
B180-2-**			2	3	55	65	80	44	27		8.5	138	27
B180-3-**			3	3	55	65	80	63	27		18	138	27
B180-4-**			4	3	55	65	80	82	27		27.5	138	27
B180-5-**			5	3	55	65	80	101	27		37	138	27
B180-6-**			6	3	55	65	80	120	27		46.5	138	27
B190-1-**	190	197	1	1	55	65	80	25					
B190-2-**			2	3	55	65	80	44	27		8.5	148	27
B190-3-**			3	3	55	65	80	63	27		18	148	27
B190-4-**			4	3	55	65	80	82	27		27.5	148	27
B190-5-**			5	3	55	65	80	101	27		37	148	27
B200-1-**	200	207	1	1	55	65	80	25					
B200-2-**			2	3	55	65	80	44	27	120	8.5	158	15
B200-3-**			3	3	55	65	80	63	27	120	18	158	15
B200-4-**			4	3	55	65	80	82	27	120	27.5	158	15
B200-5-**			5	3	55	65	80	101	27	120	37	158	15
B200-6-**			6	3	55	65	80	120	27	120	46.5	158	18
B212-1-**	212	219	1	3	55	65	80	25	25	120		170	
B212-2-**			2	3	55	65	80	44	27	120	8.5	170	15
B212-3-**			3	3	55	65	80	63	27	120	18	170	15
B212-4-**			4	3		65	80	82	27	120	27.5	170	15
B212-5-**			5	3		65	80	101	27	120	37	170	15
B212-6-**			6	3		65	80	120	27	120	46.5	170	18
B225-1-**	225	232	1	3	55	65	80	25	25	120		183	
B225-2-**			2	3	55	65	80	44	27	120	8.5	183	15
B225-3-**			3	3	55	65	80	63	27	120	18	183	15
B225-4-**			4	3		65	80	82	27	120	27.5	183	15
B225-5-**			5	3		65	80	101	27	120	37	183	15
B225-6-**			6	3		65	80	120	27	120	46.5	183	18
B240-1-**	240	247	1	3	55	65	80	25	25	120		198	
B240-2-**			2	3	55	65	80	44	27	120	8.5	198	16
B240-3-**			3	3	55	65	80	63	27	120	18	198	16
B240-4-**			4	3		65	80	82	27	120	27.5	198	16
B240-5-**			5	3		65	80	101	27	120	37	198	16
B250-1-**	250	257	1	3	55	65	80	25	25	120		208	
B250-2-**			2	3	55	65	80	44	27	120	8.5	208	16
B250-3-**			3	3	55	65	80	63	27	120	18	208	16
B250-4-**			4	3		65	80	82	27	120	27.5	208	16
B250-5-**			5	3		65	80	101	27	120	37	208	16
B250-6-**			6	3		65	80	120	27	130	46.5	208	18
B280-1-**	280	287	1	3	55	65	80	25	25	120		238	
B280-2-**			2	3	55	65	80	44	27	120	8.5	238	16
B280-3-**			3	3		65	80	63	27	120	18	238	16
B280-4-**			4	3		65	80	82	27	120	27.5	238	16
B280-5-**			5	3		65	80	101	27	120	37	238	16
B280-6-**			6	3		65	80	120	27	130	46.5	238	16
B300-1-**	300	307	1	4	55	65	80	25	25	120		258	
B300-2-**			2	4	55	65	80	44	27	120	8.5	258	15
B300-3-**			3	4		65	80	63	27	120	18	258	15
B300-4-**			4	4		65	80	82	27	120	27.5	258	18
B300-5-**			5	4		65	80	101	27	120	37	258	20
B300-6-**			6	4		65	80	120	27	130	46.5	258	22

** = Pulley bore diameter (Seat for locking device)

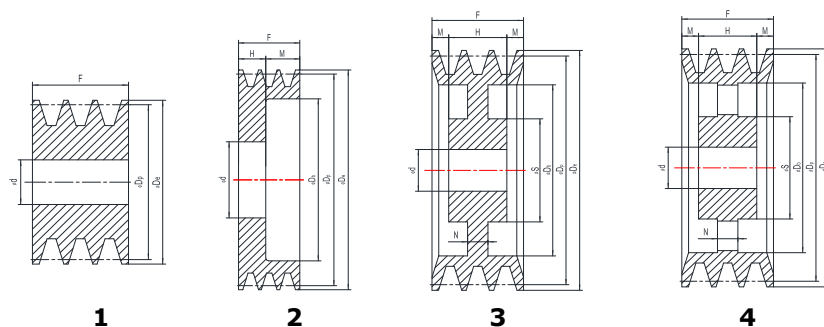

Pulley code explanation:

B355-5-**

B means: SPB type pulley


355 means: Pulley pitch 355mm

5 means: Grooves 5

** means: Pulley bore diameter

Pulley Code	Dp	De	Grooves	Form	** Ød H8			F	H	ØS	M	ØDb	N
					Ø55	Ø65	Ø80						
B315-1-**	315	322	1	4	55	65	80	25	25	130		273	15
B315-2-**			2	4	55	65	80	44	27	130	8.5	273	15
B315-3-**			3	4		65	80	63	27	130	18	273	18
B315-4-**			4	4		65	80	82	27	130	27.5	273	20
B315-5-**			5	4		65	80	101	27	130	37	273	22
B315-6-**			6	4		65	80	120	27	130	46.5	273	22
B355-1-**	355	362	1	4	55	65	80	25	25	130		308	16
B355-2-**			2	4		65	80	44	27	130	8.5	308	18
B355-3-**			3	4		65	80	63	27	130	18	308	22
B355-4-**			4	4		65	80	82	27	130	27.5	308	22
B355-5-**			5	4		65	80	101	27	130	37	308	24
B355-6-**			6	4		65	80	120	27	130	46.5	308	24
B380-1-**	380	387	1	4		65	80	25	25	130		338	20
B380-2-**			2	4		65	80	44	27	130	8.5	338	20
B380-3-**			3	4		65	80	63	27	130	18	338	22
B380-4-**			4	4		65	80	82	27	130	27.5	338	24
B380-5-**			5	4		65	80	101	27	130	37	338	24
B400-1-**	400	407	1	4		65	80	25	25	130		358	20
B400-2-**			2	4		65	80	44	27	130	8.5	358	20
B400-3-**			3	4		65	80	63	27	130	18	358	22
B400-4-**			4	4		65	80	82	27	130	27.5	358	24
B400-5-**			5	4		65	80	101	27	130	37	358	24
B425-1-**	425	432	1	4		65	80	25	25	130		383	22
B425-2-**			2	4		65	80	44	27	130	8.5	383	22
B425-3-**			3	4		65	80	63	27	130	18	383	24
B425-4-**			4	4		65	80	82	27	130	27.5	383	24
B425-5-**			5	4		65	80	101	27	130	37	383	24
B450-1-**	450	457	1	4		65	80	25	25	130		408	20
B450-2-**			2	4		65	80	44	27	130	8.5	408	20
B450-3-**			3	4		65	80	63	27	130	18	408	24
B450-4-**			4	4		65	80	82	27	130	27.5	408	24
B450-5-**			5	4		65	80	101	27	130	37	408	24
B500-1-**	500	507	1	4		65	80	25	25	130		458	20
B500-2-**			2	4		65	80	44	27	130	8.5	458	20
B500-3-**			3	4		65	80	63	27	130	18	458	24
B500-4-**			4	4		65	80	82	27	130	27.5	458	24
B500-5-**			5	4		65	80	101	27	130	37	458	24

** = Pulley bore diameter (Seat for locking device)

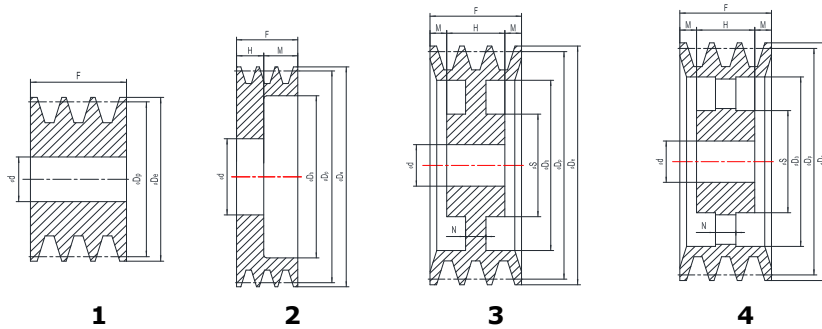

Pulley code explanation:

C130-1-**

C means: SPC type pulley


130 means: Pulley pitch 130mm

1 means: Groove 1

** means: Pulley bore diameter

Pulley Code	Dp	De	Grooves	Form	** Ød H8			F	H	ØS	M	ØDb	N
					Ø55	Ø65	Ø80						
C130-1-130	130	139.6	1	2	55	65		34	25		9	75	
C130-2-130			2	2	55	65		59.5	27		32.5	75	
C130-3-130			3	2	55	65		85	27		58	75	
C130-4-130			4	2	55	65		111	27		83.5	75	
C130-5-130			5	2	55	65		136	27		109	75	
C140-1-140	140	149.6	1	2	55	65		34	25		9	83	
C140-2-140			2	2	55	65		59.5	27		32.5	83	
C140-3-140			3	2	55	65		85	27		58	83	
C140-4-140			4	2	55	65		111	27		83.5	83	
C140-5-140			5	2	55	65		136	27		109	83	
C150-1-150	150	159.6	1	2	55	65	80	34	25		9	93	
C150-2-150			2	2	55	65	80	59.5	27		32.5	93	
C150-3-150			3	2	55	65	80	85	27		58	93	
C150-4-150			4	2	55	65	80	111	27		83.5	93	
C150-5-150			5	2	55	65	80	136	27		109	93	
C160-1-160	160	169.6	1	2	55	65	80	34	25		9	103	
C160-2-160			2	2	55	65	80	59.5	27		32.5	103	
C160-3-160			3	2	55	65	80	85	27		58	103	
C160-4-160			4	3	55	65	80	111	27		42	103	
C160-5-160			5	3	55	65	80	136	27		54.5	103	
C170-1-170	170	179.6	1	2	55	65	80	34	25		9	113	
C170-2-170			2	2	55	65	80	59.5	27		32.5	113	
C170-3-170			3	2	55	65	80	85	27		58	113	
C170-4-170			4	3	55	65	80	111	27		42	113	
C170-5-170			5	3	55	65	80	136	27		54.5	113	
C180-1-180	180	189.6	1	2	55	65	80	34	25		9	123	
C180-2-180			2	2	55	65	80	59.5	27		32.5	123	
C180-3-180			3	2	55	65	80	85	27		58	123	
C180-4-180			4	3	55	65	80	111	27		42	123	
C180-5-180			5	3	55	65	80	136	27		54.5	123	
C190-1-190	190	199.6	1	2	55	65	80	34	25		9	133	
C190-2-190			2	2	55	65	80	59.5	27		32.5	133	
C190-3-190			3	2	55	65	80	85	27		58	133	
C190-4-190			4	3	55	65	80	111	27		42	133	
C190-5-190			5	3	55	65	80	136	27		54.5	133	
C200-1-200	200	209.6	1	2	55	65	80	34	25		9	143	
C200-2-200			2	2	55	65	80	59.5	27		32.5	143	
C200-3-200			3	2	55	65	80	85	27		58	143	
C200-4-200			4	3	55	65	80	111	27		42	143	
C200-5-200			5	3	55	65	80	136	27		54.5	143	
C225-1-225	225	234.6	1	3		65	80	34	25	120	9	168	18
C225-2-225			2	3		65	80	59.5	27	120	32.5	168	18
C225-3-225			3	3		65	80	85	27	120	58	168	25
C225-4-225			4	3		65	80	111	27	120	42	168	25
C225-5-225			5	3		65	80	136	27	120	54.5	168	25
C250-1-250	250	259.6	1	3		65	80	34	25	120	9	193	18
C250-2-250			2	3		65	80	59.5	27	120	32.5	193	18
C250-3-250			3	3		65	80	85	27	120	58	193	25
C250-4-250			4	3		65	80	111	27	120	42	193	25
C250-5-250			5	3		65	80	136	27	120	54.5	193	25

** = Pulley bore diameter (Seat for locking device)

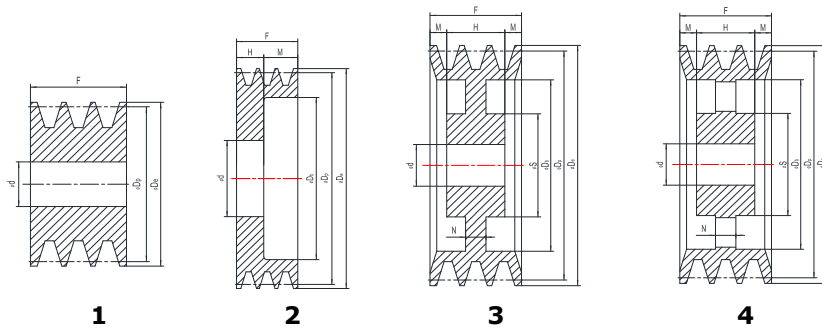

Pulley code explanation:

C280-2-**

C means: SPC type pulley

280 means: Pulley pitch 280mm

2 means: Grooves 2

** means: Pulley bore diameter

Pulley Code	Dp	De	Grooves	Form	** Ød H8			F	H	ØS	M	ØDb	N
					Ø55	Ø65	Ø80						
C280-1-**	280	289.6	1	3		65	80	34	27	120	3.5	223	18
C280-2-**			2	3		65	80	59.5	27	120	16.25	223	18
C280-3-**			3	3		65	80	85	27	120	29	223	25
C280-4-**			4	3		65	80	111	27	120	42	223	25
C280-5-**			5	3		65	80	136	27	130	54.5	223	25
C300-1-**	300	309.6	1	3		65	80	34	27	120	3.5	243	20
C300-2-**			2	3		65	80	59.5	27	120	16.25	243	20
C300-3-**			3	3		65	80	85	27	120	29	243	25
C300-4-**			4	3		65	80	111	27	120	42	243	25
C300-5-**			5	3		65	80	136	27	130	54.5	243	25
C315-1-**	315	324.6	1	4		65	80	34	27	130	3.5	258	20
C315-2-**			2	4		65	80	59.5	27	130	16.25	258	20
C315-3-**			3	4		65	80	85	27	130	29	258	25
C315-4-**			4	4		65	80	111	27	130	42	258	25
C315-5-**			5	4		65	80	136	27	130	54.5	258	25
C355-1-**	355	364.6	1	4		65	80	34	27	130	3.5	298	25
C355-2-**			2	4		65	80	59.5	27	130	16.25	298	25
C355-3-**			3	4		65	80	85	27	130	29	298	25
C355-4-**			4	4		65	80	111	27	130	42	298	25
C355-5-**			5	4		65	80	136	27	130	54.5	298	25
C380-1-**	380	389.6	1	4		65	80	34	27	130	3.5	323	25
C380-2-**			2	4		65	80	59.5	27	130	16.25	323	25
C380-3-**			3	4		65	80	85	27	130	29	323	25
C380-4-**			4	4		65	80	111	27	130	42	323	25
C380-5-**			5	4		65	80	136	27	130	54.5	323	25
C400-1-**	400	409.6	1	4		65	80	34	27	130	3.5	343	25
C400-2-**			2	4		65	80	59.5	27	130	16.25	343	25
C400-3-**			3	4		65	80	85	27	130	29	343	25
C400-4-**			4	4		65	80	111	27	130	42	343	25
C400-5-**			5	4		65	80	136	27	130	54.5	343	25
C425-1-**	425	434.6	1	4		65	80	34	27	130	3.5	368	25
C425-2-**			2	4		65	80	59.5	27	130	16.25	368	25
C425-3-**			3	4		65	80	85	27	130	29	368	25
C425-4-**			4	4		65	80	111	27	130	42	368	25
C425-5-**			5	4		65	80	136	27	130	54.5	368	25
C450-1-**	450	459.6	1	4		65	80	34	27	130	3.5	393	25
C450-2-**			2	4		65	80	59.5	27	130	16.25	393	25
C450-3-**			3	4		65	80	85	27	130	29	393	25
C450-4-**			4	4		65	80	111	27	130	42	393	25
C450-5-**			5	4		65	80	136	27	130	54.5	393	25
C500-1-**	500	509.6	1	4		65	80	34	27	130	3.5	443	25
C500-2-**			2	4		65	80	59.5	27	130	16.25	443	25
C500-3-**			3	4		65	80	85	27	130	29	443	25
C500-4-**			4	4		65	80	111	27	130	42	443	25
C500-5-**			5	4		65	80	136	27	130	54.5	443	25

** = Pulley bore diameter (Seat for locking device)