

Timing Pulleys

8M 14M

L H





T5 T10 AT5 AT10



8M-20 with pilot bore

For belt width 20mm


Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
22 8M-20	2F	St	22	56.02	54.65	60	43	28	38	12
24 8M-20	2F	St	24	61.11	59.74	66	45	28	38	12
26 8M-20	2F	St	26	66.21	64.84	71	48	28	38	12
28 8M-20	2F	St	28	71.30	70.08	75	50	28	38	14
30 8M-20	2F	St	30	76.39	75.13	83	55	28	38	14
32 8M-20	2F	St	32	81.49	80.16	87	60	28	38	14
34 8M-20	2F	St	34	86.58	85.21	91	66	28	38	14
36 8M-20	2F	St	36	91.67	90.30	98	70	28	38	14
38 8M-20	2F	St	38	96.77	95.39	103	75	28	38	14
40 8M-20	2F	St	40	101.86	100.49	106	75	28	38	14
44 8M-20	2F	St	44	112.05	110.67	119	75	28	38	14
48 8M-20	2F	St	48	122.23	120.86	127	75	28	38	14
56 8M-20	3F	St	56	142.60	141.23	148	80	28	38	14
64 8M-20	3F	St	64	162.97	161.60	168	80	28	38	14
72 8M-20	3F	St	72	183.35	181.97	192	80	28	38	14
80 8M-20	3	St	80	203.72	202.35	—	90	28	38	14
90 8M-20	3	St	90	229.18	227.81	—	90	28	38	14
112 8M-20	4	St	112	285.21	283.83	—	90	28	38	18
144 8M-20	4	St	144	366.69	365.32	—	90	28	38	20
168 8M-20	4	St	168	427.81	426.44	—	100	28	38	20
192 8M-20	4	St	192	488.92	487.55	—	100	28	38	20



8M-30 with pilot bore

For belt width 30mm


Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
22 8M-30	2F	St	22	56.02	54.65	60	43	38	48	12
24 8M-30	2F	St	24	61.11	59.74	66	45	38	48	12
26 8M-30	2F	St	26	66.21	64.84	71	48	38	48	12
28 8M-30	2F	St	28	71.30	70.08	75	50	38	48	14
30 8M-30	2F	St	30	76.39	75.13	83	55	38	48	14
32 8M-30	2F	St	32	81.49	80.16	87	60	38	48	14
34 8M-30	2F	St	34	86.58	85.21	91	66	38	48	14
36 8M-30	2F	St	36	91.67	90.30	98	70	38	48	14
38 8M-30	2F	St	38	96.77	95.39	103	75	38	48	14
40 8M-30	2F	St	40	101.86	100.49	106	75	38	48	14
44 8M-30	2F	St	44	112.05	110.67	119	75	38	48	14
48 8M-30	2F	St	48	122.23	120.86	127	75	38	48	14
56 8M-30	3F	St	56	142.60	141.23	148	90	38	48	14
64 8M-30	3F	St	64	162.97	161.60	168	90	38	48	14
72 8M-30	3F	St	72	183.35	181.97	192	95	38	48	14
80 8M-30	3	St	80	203.72	202.35	—	100	38	48	14
90 8M-30	3	St	90	229.18	227.81	—	100	38	48	14
112 8M-30	4	St	112	285.21	283.83	—	100	38	48	18
144 8M-30	4	St	144	366.69	365.32	—	100	38	48	20
168 8M-30	4	St	168	427.81	426.44	—	100	38	48	20
192 8M-30	4	St	192	488.92	487.55	—	100	38	48	20




8M-50 with pilot bore

For belt width 50mm


Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
22 8M-50	2F	St	22	56.02	54.65	60	43	60	70	12
24 8M-50	2F	St	24	61.11	59.74	66	45	60	70	12
26 8M-50	2F	St	26	66.21	64.84	71	48	60	70	12
28 8M-50	2F	St	28	71.30	70.08	75	50	60	70	14
30 8M-50	2F	St	30	76.39	75.13	83	55	60	70	14
32 8M-50	2F	St	32	81.49	80.16	87	60	60	70	14
34 8M-50	2F	St	34	86.58	85.21	91	66	60	70	14
36 8M-50	2F	St	36	91.67	90.30	98	70	60	70	14
38 8M-50	2F	St	38	96.77	95.39	103	75	60	70	14
40 8M-50	2F	St	40	101.86	100.49	106	75	60	70	14
44 8M-50	2F	St	44	112.05	110.67	119	75	60	70	14
48 8M-50	2F	St	48	122.23	120.86	127	75	60	70	14
56 8M-50	7F	St	56	142.60	141.23	148	90	60	70	18
64 8M-50	7F	St	64	162.97	161.60	168	100	60	60	18
72 8M-50	7F	St	72	183.35	181.97	192	100	60	60	18
80 8M-50	7	St	80	203.72	202.35	—	110	60	60	18
90 8M-50	7	St	90	229.18	227.81	—	110	60	60	18
112 8M-50	8	St	112	285.21	283.83	—	110	60	60	18
144 8M-50	8	St	144	366.69	365.32	—	110	60	60	20
168 8M-50	8	St	168	427.81	426.44	—	120	60	60	20
192 8M-50	8	St	192	488.92	487.55	—	130	60	60	20




(2F)



(7F)



(7)



(8)

8M-85 with pilot bore




For belt width 85mm

Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
22 8M-85	2F	St	22	56.02	54.65	60	43	95	105	12
24 8M-85	2F	St	24	61.11	59.74	66	45	95	105	12
26 8M-85	2F	St	26	66.21	64.84	71	48	95	105	12
28 8M-85	2F	St	28	71.30	70.08	75	50	95	105	14
30 8M-85	2F	St	30	76.39	75.13	83	55	95	105	14
32 8M-85	2F	St	32	81.49	80.16	87	60	95	105	14
34 8M-85	2F	St	34	86.58	85.21	91	66	95	105	14
36 8M-85	2F	St	36	91.67	90.30	98	70	95	105	14
38 8M-85	2F	St	38	96.77	95.39	103	75	95	105	14
40 8M-85	2F	St	40	101.86	100.49	106	75	95	105	14
44 8M-85	2F	St	44	112.05	110.67	119	75	95	105	14
48 8M-85	2F	St	48	122.23	120.86	127	75	95	105	14
56 8M-85	2F	St	56	142.60	141.23	148	80	95	105	18
64 8M-85	7F	St	64	162.97	161.60	168	100	95	95	18
72 8M-85	7F	St	72	183.35	181.97	192	110	95	95	18
80 8M-85	8	St	80	203.72	202.35	—	110	95	95	20
90 8M-85	8	St	90	229.18	227.81	—	110	95	95	20
112 8M-85	8	St	112	285.21	283.83	—	110	95	95	24
144 8M-85	8	St	144	366.69	365.32	—	120	95	95	24
168 8M-85	8	St	168	427.81	426.44	—	120	95	95	24
192 8M-85	8	St	192	488.92	487.55	—	130	95	95	24

14M-40 with pilot bore

For belt width 40mm



Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
28 14M-40	2F	St	28	124.78	122.12	127	100	54	69	24
30 14M-40	2F	St	30	133.69	130.99	138	100	54	69	24
32 14M-40	2F	St	32	142.60	139.88	154	100	54	69	24
34 14M-40	2F	St	34	151.52	148.79	160	100	54	69	24
36 14M-40	2F	St	36	160.43	157.68	168	100	54	69	24
38 14M-40	2F	St	38	169.34	166.60	183	120	54	69	24
40 14M-40	2F	St	40	178.25	175.49	188	120	54	69	24
44 14M-40	2F	St	44	196.08	193.28	211	120	54	69	24
48 14M-40	3F	St	48	213.90	211.11	226	135	54	69	24
56 14M-40	3F	St	56	249.55	246.76	256	135	54	69	28
64 14M-40	3F	St	64	285.21	282.41	296	135	54	69	28
72 14M-40	4	St	72	320.86	318.06	—	135	54	69	28
80 14M-40	4	St	80	356.51	353.71	—	135	54	69	28
90 14M-40	4	St	90	401.07	398.28	—	135	54	69	28
112 14M-40	4	St	112	499.11	496.32	—	135	54	69	28
144 14M-40	4	St	144	641.71	638.92	—	135	54	69	28
168 14M-40	4	St	168	748.66	745.87	—	135	54	69	28
192 14M-40	4	St	192	855.62	852.82	—	135	54	69	28



14M-55 with pilot bore

For belt width 55mm




Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
28 14M-55	2F	St	28	124.78	122.12	127	100	70	85	24
30 14M-55	2F	St	30	133.69	130.99	138	100	70	85	24
32 14M-55	2F	St	32	142.60	139.88	154	100	70	85	24
34 14M-55	2F	St	34	151.52	148.79	160	100	70	85	24
36 14M-55	2F	St	36	160.43	157.68	168	100	70	85	24
38 14M-55	2F	St	38	169.34	166.60	183	120	70	85	24
40 14M-55	2F	St	40	178.25	175.49	188	120	70	85	24
44 14M-55	2F	St	44	196.08	193.28	211	120	70	85	24
48 14M-55	7F	St	48	213.90	211.11	226	135	70	70	24
56 14M-55	7F	St	56	249.55	246.76	256	135	70	70	28
64 14M-55	7F	St	64	285.21	282.41	296	135	70	70	28
72 14M-55	8	GG	72	320.86	318.06	—	135	70	70	28
80 14M-55	8	GG	80	356.51	353.71	—	135	70	70	28
90 14M-55	8	GG	90	401.07	398.28	—	135	70	70	28
112 14M-55	8	GG	112	499.11	496.32	—	135	70	70	28
144 14M-55	8	GG	144	641.71	638.92	—	135	70	70	28
168 14M-55	8	GG	168	748.66	745.87	—	135	70	70	28
192 14M-55	8	GG	192	855.62	852.82	—	135	70	70	28



14M-85 with pilot bore

For belt width 85mm

Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
28 14M-85	2F	St	28	124.78	122.12	127	100	102	117	24
30 14M-85	2F	St	30	133.69	130.99	138	100	102	117	24
32 14M-85	2F	St	32	142.60	139.88	154	100	102	117	24
34 14M-85	2F	St	34	151.52	148.79	160	100	102	117	24
36 14M-85	2F	St	36	160.43	157.68	168	100	102	117	32
38 14M-85	2F	St	38	169.34	166.60	183	120	102	117	32
40 14M-85	2F	St	40	178.25	175.49	188	135	102	117	32
44 14M-85	2F	St	44	196.08	193.28	211	135	102	117	32
48 14M-85	2F	St	48	213.90	211.11	226	135	102	117	32
56 14M-85	7F	St	56	249.55	246.76	256	150	102	102	32
64 14M-85	7F	St	64	285.21	282.41	296	150	102	102	32
72 14M-85	8	GG	72	320.86	318.06	–	150	102	102	32
80 14M-85	8	GG	80	356.51	353.71	–	150	102	102	32
90 14M-85	8	GG	90	401.07	398.28	–	150	102	102	32
112 14M-85	8	GG	112	499.11	496.32	–	150	102	102	32
144 14M-85	8	GG	144	641.71	638.92	–	150	102	102	32
168 14M-85	8	GG	168	748.66	745.87	–	150	102	102	32
192 14M-85	8	GG	192	855.62	852.82	–	165	102	102	32






14M-115 with pilot bore

For belt width 115mm

Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
28 14M-115	2F	St	28	124.78	122.12	127	100	133	148	32
30 14M-115	2F	St	30	133.69	130.99	138	100	133	148	32
32 14M-115	2F	St	32	142.60	139.88	154	100	133	148	32
34 14M-115	2F	St	34	151.52	148.79	160	100	133	148	32
36 14M-115	2F	St	36	160.43	157.68	168	120	133	148	32
38 14M-115	2F	St	38	169.34	166.60	183	120	133	148	32
40 14M-115	2F	St	40	178.25	175.49	188	135	133	148	32
44 14M-115	2F	St	44	196.08	193.28	211	140	133	148	32
48 14M-115	2F	St	48	213.90	211.11	226	150	133	148	32
56 14M-115	2F	St	56	249.55	246.76	256	150	133	148	32
64 14M-115	7F	St	64	285.21	282.41	296	150	133	148	32
72 14M-115	8	GG	72	320.86	318.06	–	150	133	148	32
80 14M-115	8	GG	80	356.51	353.71	–	150	133	148	32
90 14M-115	8	GG	90	401.07	398.28	–	150	133	148	32
112 14M-115	8	GG	112	499.11	496.32	–	150	133	148	32
144 14M-115	8	GG	144	641.71	638.92	–	165	133	148	32
168 14M-115	8	GG	168	748.66	745.87	–	165	133	148	32
192 14M-115	8	GG	192	855.62	852.82	–	165	133	148	32


14M-170 with pilot bore For belt width 170mm

Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
28 14M-170	2F	St	28	124.78	122.12	127	100	187	202	32
30 14M-170	2F	St	30	133.69	130.99	138	100	187	202	32
32 14M-170	2F	St	32	142.60	139.88	154	100	187	202	32
34 14M-170	2F	St	34	151.52	148.79	160	100	187	202	32
36 14M-170	2F	St	36	160.43	157.68	168	120	187	202	32
38 14M-170	2F	St	38	169.34	166.60	183	135	187	202	32
40 14M-170	2F	St	40	178.25	175.49	188	140	187	202	32
44 14M-170	2F	St	44	196.08	193.28	211	160	187	202	32
48 14M-170	2F	St	48	213.90	211.11	226	160	187	202	32
56 14M-170	2F	St	56	249.55	246.76	256	160	187	202	32
64 14M-170	2F	St	64	285.21	282.41	296	180	187	202	32
72 14M-170	7	St	72	320.86	318.06	—	180	187	187	32
80 14M-170	7	St	80	356.51	353.71	—	180	187	187	32
90 14M-170	8	GG	90	401.07	398.28	—	180	187	187	38
112 14M-170	8	GG	112	499.11	496.32	—	200	187	187	38
144 14M-170	8	GG	144	641.71	638.92	—	220	187	187	38
168 14M-170	8	GG	168	748.66	745.87	—	220	187	187	38
192 14M-170	8	GG	192	855.62	852.82	—	220	187	187	38




8M-20 with taper bore For belt width 20mm

Part No.	Type	Bush	Z	Dp	De	Df	Dm	F	L	R
TB22 8M-20	16F	1008	22	56.02	54.65	60	–	28	22	6
TB24 8M-20	16F	1108	24	61.11	59.75	66	–	28	22	6
TB26 8M-20	16F	1108	26	66.21	64.84	71	–	28	22	6
TB28 8M-20	16F	1108	28	71.30	70.08	75	–	28	22	6
TB30 8M-20	16F	1108	30	76.39	75.13	83	–	28	22	6
TB32 8M-20	16F	1610	32	81.49	80.16	87	–	28	25	3
TB34 8M-20	16F	1610	34	86.58	85.21	91	–	28	25	3
TB36 8M-20	16F	1610	36	91.67	90.30	98	–	28	25	3
TB38 8M-20	16F	1610	38	96.77	95.39	103	–	28	25	3
TB40 8M-20	16F	1610	40	101.86	100.49	106	–	28	25	3
TB44 8M-20	10F	2012	44	112.05	110.67	119	92	28	32	4
TB48 8M-20	10F	2012	48	122.23	120.86	127	96	28	32	4
TB56 8M-20	10F	2012	56	142.60	141.23	148	110	28	32	4
TB64 8M-20	11F	2012	64	162.97	161.60	168	110	28	32	4
TB72 8M-20	11F	2012	72	183.35	181.97	192	110	28	32	4
TB80 8M-20	11	2012	80	203.72	202.35	–	110	28	32	4
TB90 8M-20	11	2012	90	229.18	227.81	–	110	28	32	4

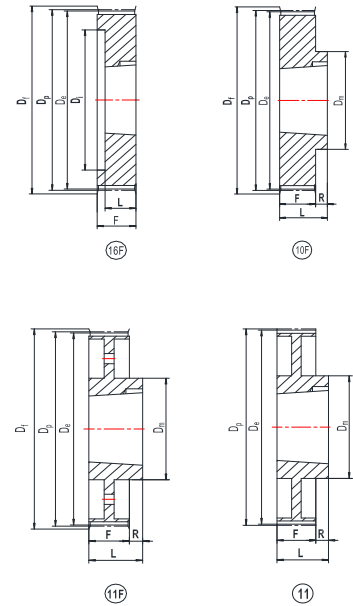




8M-30 with taper bore For belt width 30mm

Part No.	Type	Bush	Z	Dp	De	Df	Dm	F	L	R
TB22 8M-30	16F	1008	22	56.02	54.65	60	–	38	22	16
TB24 8M-30	16F	1108	24	61.11	59.75	66	–	38	22	16
TB26 8M-30	16F	1108	26	66.21	64.84	71	–	38	22	16
TB28 8M-30	16F	1210	28	71.30	70.08	75	–	38	25	13
TB30 8M-30	15F	1615	30	76.39	75.13	83	–	38	38	–
TB32 8M-30	15F	1615	32	81.49	80.16	87	–	38	38	–
TB34 8M-30	15F	1615	34	86.58	85.21	91	–	38	38	–
TB36 8M-30	15F	1615	36	91.67	90.30	98	–	38	38	–
TB38 8M-30	15F	1615	38	96.77	95.39	103	–	38	38	–
TB40 8M-30	15F	1615	40	101.86	100.49	106	–	38	38	–
TB44 8M-30	18F	2012	44	112.05	110.67	119	–	38	32	3
TB48 8M-30	18F	2012	48	122.23	120.86	127	–	38	32	3
TB56 8M-30	18F	2012	56	142.60	141.23	148	–	38	32	3
TB64 8M-30	10F	2517	64	162.97	161.60	168	125	38	45	7
TB72 8M-30	11F	2517	72	183.35	181.97	192	125	38	45	7
TB80 8M-30	11	2517	80	203.72	202.35	–	125	38	45	7
TB90 8M-30	11	2517	90	229.18	227.81	–	125	38	45	7
TB112 8M-30	12	2517	112	285.21	283.83	–	125	38	45	7
TB144 8M-30	12	2517	144	366.69	365.32	–	125	38	45	7

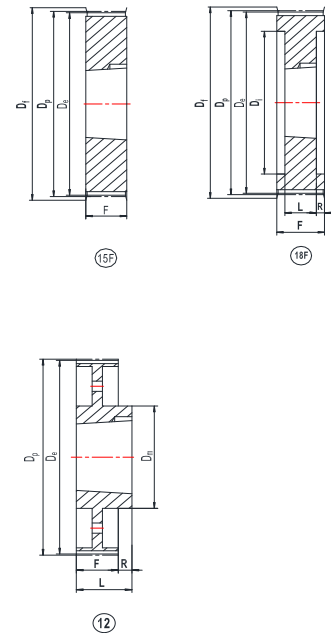



8M-50 with taper bore For belt width 50mm

Part No.	Type	Bush	Z	Dp	De	Df	Dm	F	L	R
TB28 8M-50	16F	1210	28	71.30	70.08	75	—	60	25	35
TB30 8M-50	16F	1615	30	76.39	75.13	83	—	60	38	22
TB32 80-50	16F	1615	32	81.49	80.16	87	—	60	38	22
TB34 8M-50	16F	1615	34	86.58	85.21	91	—	60	38	22
TB36 8M-50	16F	1615	36	91.67	90.30	98	—	60	38	22
TB38 8M-50	16F	1615	38	96.77	95.39	103	—	60	38	22
TB40 8M-50	18F	2012	40	101.86	100.49	106	—	60	32	14
TB44 8M-50	18F	2012	44	112.05	110.67	119	—	60	32	14
TB48 8M-50	18F	2012	48	122.23	120.86	127	—	60	32	14
TB56 8M-50	18F	2517	56	142.60	141.23	148	—	60	45	7.5
TB64 8M-50	18F	2517	64	162.97	161.60	168	—	60	45	7.5
TB72 8M-50	19F	2517	72	183.35	181.97	192	125	60	45	7.5
TB80 8M-50	18	3020	80	203.72	202.35	—	—	60	51	4.5
TB90 8M-50	19	3020	90	229.18	227.81	—	160	60	51	4.5
TB112 8M-50	19	3020	112	285.21	283.83	—	170	60	51	4.5
TB144 8M-50	20	3020	144	366.69	365.32	—	170	60	51	4.5
TB168 8M-50	14	3525	168	427.81	426.44	—	198	60	65	2.5
TB192 8M-50	14	3525	192	488.92	487.55	—	198	60	65	2.5

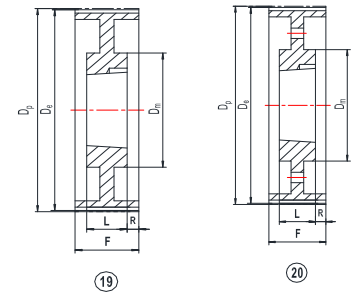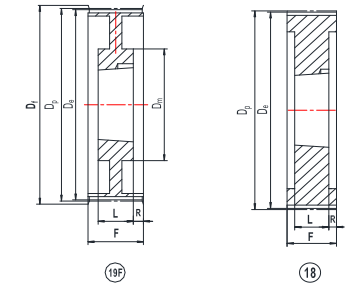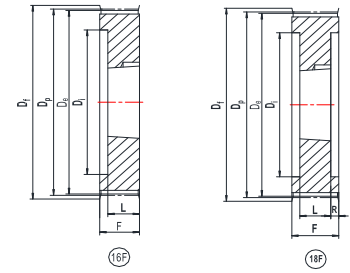



14M-40 with taper bore For belt width 40mm

Part No.	Type	Bush	Z	Dp	De	Df	Dm	F	L	R
TB28 14M-40	18F	2012	28	124.78	122.12	127	–	54	32	11
TB30 14M-40	18F	2012	30	133.69	130.99	138	–	54	32	11
TB32 14M-40	18F	2012	32	142.60	139.88	154	–	54	32	11
TB34 14M-40	18F	2517	34	151.52	148.79	160	–	54	45	4.5
TB36 14M-40	18F	2517	36	160.43	157.68	168	–	54	45	4.5
TB38 14M-40	18F	2517	38	169.34	166.60	183	–	54	45	4.5
TB40 14M-40	18F	2517	40	178.25	175.49	188	–	54	45	4.5
TB44 14M-40	18F	3020	44	196.08	193.28	211	–	54	51	1.5
TB48 14M-40	18F	3020	48	213.90	211.11	226	–	54	51	1.5
TB56 14M-40	18F	3020	56	249.55	246.76	256	170	54	51	1.5
TB64 14M-40	19F	3020	64	285.21	282.41	296	170	54	51	1.5
TB72 14M-40	19	3020	72	320.86	318.06	–	170	54	51	1.5
TB80 14M-40	20	3020	80	356.51	353.71	–	170	54	51	1.5
TB90 14M-40	20	3020	90	401.07	398.28	–	170	54	51	1.5
TB112 14M-40	20	3020	112	499.11	496.32	–	170	54	51	1.5
TB144 14M-40	20	3020	144	641.71	638.92	–	170	54	51	1.5
TB168 14M-40	20	3020	168	748.66	745.87	–	170	54	51	1.5
TB192 14M-40	20	3020	192	855.62	852.82	–	170	54	51	1.5








14M-55 with taper bore For belt width 55mm

Part No.	Type	Bush	Z	Dp	De	Df	Dm	F	L	R
TB28 14M-55	18F	2012	28	124.78	122.12	127	–	70	32	19
TB30 14M-55	18F	2517	30	133.69	130.99	138	–	70	45	12.5
TB32 14M-55	18F	2517	32	142.60	139.88	154	–	70	45	12.5
TB34 14M-55	18F	2517	34	151.52	148.79	160	–	70	45	12.5
TB36 14M-55	18F	2517	36	160.43	157.68	168	–	70	45	12.5
TB38 14M-55	18F	2517	38	169.34	166.60	183	–	70	45	12.5
TB40 14M-55	18F	2517	40	178.25	175.49	188	–	70	45	12.5
TB44 14M-55	18F	3020	44	196.08	193.28	211	–	70	51	9.5
TB48 14M-55	18F	3020	48	213.90	211.11	226	–	70	51	9.5
TB56 14M-55	18F	3020	56	249.55	246.76	256	170	70	51	9.5
TB64 14M-55	19F	3020	64	285.21	282.41	296	170	70	51	9.5
TB72 14M-55	19	3020	72	320.86	318.06	–	170	70	51	9.5
TB80 14M-55	20	3020	80	356.51	353.71	–	170	70	51	9.5
TB90 14M-55	20	3020	90	401.07	398.28	–	170	70	51	9.5
TB112 14M-55	20	3020	112	499.11	496.32	–	170	70	51	9.5
TB144 14M-55	20	3020	144	641.71	638.92	–	170	70	51	9.5
TB168 14M-55	20	3020	168	748.66	745.87	–	170	70	51	9.5
TB192 14M-55	20	3020	192	855.62	852.82	–	170	70	51	9.5



14M-85 with taper bore For belt width 85mm

Part No.	Type	Bush	Z	Dp	De	Df	Dm	F	L	R
TB28 14M-85	18F	2517	28	124.78	122.12	127	—	102	45	28.5
TB30 14M-85	18F	2517	30	133.69	130.99	138	—	102	45	28.5
TB32 14M-85	18F	2517	32	142.60	139.88	154	—	102	45	28.5
TB34 14M-85	18F	2517	34	151.52	148.79	160	—	102	45	28.5
TB36 14M-85	18F	3020	36	160.43	157.68	168	—	102	51	25.5
TB38 14M-85	18F	3020	38	169.34	166.60	183	—	102	51	25.5
TB40 14M-85	18F	3020	40	178.25	175.49	188	—	102	51	25.5
TB44 14M-85	18F	3020	44	196.08	193.28	211	—	102	76	13
TB48 14M-85	18F	3020	48	213.90	211.11	226	—	102	76	13
TB56 14M-85	18F	3525	56	249.55	246.76	256	190	102	65	18.5
TB64 14M-85	19F	3525	64	285.21	282.41	296	190	102	65	18.5
TB72 14M-85	19	3525	72	320.86	318.06	—	190	102	65	18.5
TB80 14M-85	20	3525	80	356.51	353.71	—	190	102	65	18.5
TB90 14M-85	20	3525	90	401.07	398.28	—	190	102	65	18.5
TB112 14M-85	20	3525	112	499.11	496.32	—	190	102	65	18.5
TB144 14M-85	20	3525	144	641.71	638.92	—	190	102	65	18.5
TB168 14M-85	20	3525	168	748.66	745.87	—	190	102	65	18.5
TB192 14M-85	22	4040	192	855.62	852.82	—	230	102	102	—




14M-115 with taper bore For belt width 115mm

Part No.	Type	Bush	Z	Dp	De	Df	Dm	F	L	R
TB28 14M-115	18F	2517	28	124.78	122.12	127	—	133	45	44
TB30 14M-115	18F	2517	30	133.69	130.99	138	—	133	45	44
TB32 14M-115	18F	2517	32	142.60	139.88	154	—	133	45	44
TB34 14M-115	18F	2517	34	151.52	148.79	160	—	133	45	44
TB36 14M-115	18F	3020	36	160.43	157.68	168	—	133	51	41
TB38 14M-115	18F	3020	38	169.34	166.60	183	—	133	51	41
TB40 14M-115	18F	3020	40	178.25	175.49	188	—	133	51	41
TB44 14M-115	18F	3020	44	196.08	193.28	211	—	133	76	28.5
TB48 14M-115	18F	3020	48	213.90	211.11	226	—	133	76	28.5
TB56 14M-115	18F	3535	56	249.55	246.76	256	190	133	89	22
TB64 14M-115	19F	3535	64	285.21	282.41	296	190	133	89	22
TB72 14M-115	19	3535	72	320.86	318.06	—	190	133	89	22
TB80 14M-115	20	3535	80	356.51	353.71	—	190	133	89	22
TB90 14M-115	20	3535	90	401.07	398.28	—	190	133	89	22
TB112 14M-115	20	3535	112	499.11	496.32	—	190	133	89	22
TB144 14M-115	20	4040	144	641.71	638.92	—	230	133	102	15.5
TB168 14M-115	20	4040	168	748.66	745.87	—	230	133	102	15.5
TB192 14M-115	20	4040	192	855.62	852.82	—	230	133	102	15.5


L050 with pilot bore

For belt width 1/2"

Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
12 L 050	2F	St	12	36.38	35.62	42	24	19	30	8
13 L 050	2F	St	13	39.41	38.65	44	28	19	30	8
14 L 050	2F	St	14	42.44	41.68	48	28	19	30	8
15 L 050	2F	St	15	45.48	44.72	51	34	19	30	8
16 L 050	2F	St	16	48.51	47.75	54	36	19	32	8
17 L 050	2F	St	17	51.54	50.78	57	36	19	32	10
18 L 050	2F	St	18	54.57	53.81	60	40	19	32	10
19 L 050	2F	St	19	57.61	56.84	63	40	19	32	10
20 L 050	2F	St	20	60.64	59.88	66	40	19	32	10
21 L 050	2F	St	21	63.67	62.91	71	45	19	32	10
22 L 050	2F	St	22	66.70	65.94	75	45	19	32	10
23 L 050	2F	St	23	69.73	68.97	79	55	19	32	10
24 L 050	2F	St	24	72.77	72.00	79	55	19	32	10
25 L 050	2F	St	25	75.80	75.04	83	58	19	32	10
26 L 050	2F	St	26	78.83	78.07	87	58	19	32	12
27 L 050	2F	St	27	81.86	81.10	87	58	19	32	12
28 L 050	2F	St	28	84.89	84.13	91	58	19	32	12
30 L 050	2F	St	30	90.96	90.20	97	70	19	32	12
32 L 050	2F	St	32	97.03	96.26	103	70	19	32	12
33 L 050	2F	St	33	100.05	99.29	106	70	19	32	12
34 L 050	2F	St	34	103.08	102.32	111	70	19	32	12
35 L 050	2F	St	35	106.12	105.35	111	70	19	32	12
36 L 050	2F	St	36	109.15	108.39	115	70	19	32	12
40 L 050	2F	St	40	121.29	120.51	127	70	19	32	12
42 L 050	2F	St	42	127.34	126.58	135	70	19	32	12
44 L 050	2F	St	44	133.40	132.64	140	70	19	32	12
45 L 050	2F	St	45	136.44	135.67	143	70	19	32	12
48 L 050	2F	St	48	145.53	144.77	152	70	19	32	12
50 L 050	4	GG	50	151.60	150.83		70	19	32	14
52 L 050	4	GG	52	157.66	156.90		70	19	32	14
56 L 050	4	GG	56	169.79	169.02		70	19	32	14
57 L 050	4	GG	57	172.82	172.06		70	19	32	14
60 L 050	4	GG	60	181.91	181.15		75	19	42	14
72 L 050	4	GG	72	218.29	217.53		75	19	42	14
84 L 050	4	GG	84	254.68	253.92		75	19	42	14
96 L 050	4	GG	96	291.06	290.30		75	19	42	14



(2F)

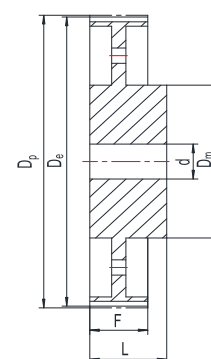


(4)


L075 with pilot bore

For belt width 3/4"

Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
12 L 075	2F	St	12	36.38	35.62	42	24	25.4	38	8
13 L 075	2F	St	13	39.41	38.65	44	28	25.4	38	8
14 L 075	2F	St	14	42.44	41.68	48	28	25.4	38	8
15 L 075	2F	St	15	45.48	44.72	51	34	25.4	38	8
16 L 075	2F	St	16	48.51	47.75	54	36	25.4	38	8
17 L 075	2F	St	17	51.54	50.78	57	36	25.4	38	10
18 L 075	2F	St	18	54.57	53.81	60	40	25.4	38	10
19 L 075	2F	St	19	57.61	56.84	63	40	25.4	38	10
20 L 075	2F	St	20	60.64	59.88	66	40	25.4	38	10
21 L 075	2F	St	21	63.67	62.91	71	45	25.4	38	10
22 L 075	2F	St	22	66.70	65.94	75	45	25.4	38	10
23 L 075	2F	St	23	69.73	68.97	79	55	25.4	38	10
24 L 075	2F	St	24	72.77	72.00	79	55	25.4	38	10
25 L 075	2F	St	25	75.80	75.04	83	58	25.4	38	10
26 L 075	2F	St	26	78.83	78.07	87	58	25.4	38	12
27 L 075	2F	St	27	81.86	81.10	87	58	25.4	38	12
28 L 075	2F	St	28	84.89	84.13	91	58	25.4	38	12
30 L 075	2F	St	30	90.96	90.20	97	70	25.4	38	12
32 L 075	2F	St	32	97.03	96.26	103	70	25.4	38	12
33 L 075	2F	St	33	100.05	99.29	106	70	25.4	38	12
34 L 075	2F	St	34	103.08	102.32	111	70	25.4	38	12
35 L 075	2F	St	35	106.12	105.35	111	70	25.4	38	12
36 L 075	2F	St	36	109.15	108.39	115	70	25.4	38	12
40 L 075	2F	St	40	121.29	120.51	127	70	25.4	38	12
42 L 075	2F	St	42	127.34	126.58	135	70	25.4	38	12
44 L 075	2F	St	44	133.40	132.64	140	70	25.4	38	12
45 L 075	2F	St	45	136.44	135.67	143	70	25.4	38	12
48 L 075	2F	St	48	145.53	144.77	152	70	25.4	38	12
50 L 075	4	GG	50	151.60	150.83		70	25.4	38	14
52 L 075	4	GG	52	157.66	156.90		70	25.4	38	14
56 L 075	4	GG	56	169.79	169.02		70	25.4	38	14
57 L 075	4	GG	57	172.82	172.06		70	25.4	38	14
60 L 075	4	GG	60	181.91	181.15		75	25.4	45	14
72 L 075	4	GG	72	218.29	217.53		75	25.4	45	14
84 L 075	4	GG	84	254.68	253.92		75	25.4	45	14
96 L 075	4	GG	96	291.06	290.30		75	25.4	45	14



(2F)

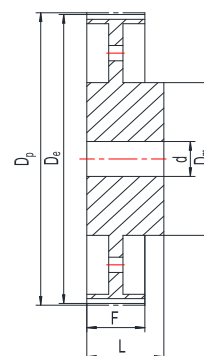


(4)


L100 with pilot bore

For belt width 1"

Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
12 L 100	2F	St	12	36.38	35.62	42	24	31.8	45	8
13 L 100	2F	St	13	39.41	38.65	44	28	31.8	45	8
14 L 100	2F	St	14	42.44	41.68	48	28	31.8	45	8
15 L 100	2F	St	15	45.48	44.72	51	34	31.8	45	8
16 L 100	2F	St	16	48.51	47.75	54	36	31.8	45	8
17 L 100	2F	St	17	51.54	50.78	57	36	31.8	45	10
18 L 100	2F	St	18	54.57	53.81	60	40	31.8	45	10
19 L 100	2F	St	19	57.61	56.84	63	40	31.8	45	10
20 L 100	2F	St	20	60.64	59.88	66	40	31.8	45	10
21 L 100	2F	St	21	63.67	62.91	71	45	31.8	45	10
22 L 100	2F	St	22	66.70	65.94	75	45	31.8	45	10
23 L 100	2F	St	23	69.73	68.97	79	55	31.8	45	10
24 L 100	2F	St	24	72.77	72.00	79	55	31.8	45	10
25 L 100	2F	St	25	75.80	75.04	83	58	31.8	45	10
26 L 100	2F	St	26	78.83	78.07	87	58	31.8	45	12
27 L 100	2F	St	27	81.86	81.10	87	58	31.8	45	12
28 L 100	2F	St	28	84.89	84.13	91	58	31.8	45	12
30 L 100	2F	St	30	90.96	90.20	97	70	31.8	45	12
32 L 100	2F	St	32	97.03	96.26	103	70	31.8	45	12
33 L 100	2F	St	33	100.05	99.29	106	70	31.8	45	12
34 L 100	2F	St	34	103.08	102.32	111	70	31.8	45	12
35 L 100	2F	St	35	106.12	105.35	111	70	31.8	45	12
36 L 100	2F	St	36	109.15	108.39	115	70	31.8	45	12
40 L 100	2F	St	40	121.29	120.51	127	70	31.8	45	12
42 L 100	2F	St	42	127.34	126.58	135	70	31.8	45	12
44 L 100	2F	St	44	133.40	132.64	140	70	31.8	45	12
45 L 100	2F	St	45	136.44	135.67	143	70	31.8	45	12
48 L 100	2F	St	48	145.53	144.77	152	70	31.8	45	12
50 L 100	4	GG	50	151.60	150.83		70	31.8	45	14
52 L 100	4	GG	52	157.66	156.90		70	31.8	45	14
56 L 100	4	GG	56	169.79	169.02		70	31.8	45	14
57 L 100	4	GG	57	172.82	172.06		70	31.8	45	14
60 L 100	4	GG	60	181.91	181.15		75	31.8	45	14
72 L 100	4	GG	72	218.29	217.53		75	31.8	45	14
84 L 100	4	GG	84	254.68	253.92		75	31.8	45	14
96 L 100	4	GG	96	291.06	290.30		75	31.8	45	14



(2F)


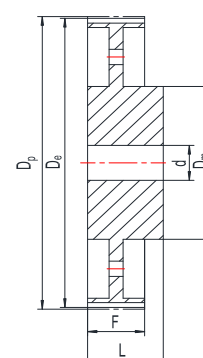


(4)

H100 with pilot bore

For belt width 1"



Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
14 H 100	2F	St	14	56.59	55.22	63	40	31.8	45	12
15 H 100	2F	St	15	60.64	29.27	70	45	31.8	45	12
16 H 100	2F	St	16	64.67	63.31	70	45	31.8	45	12
17 H 100	2F	St	17	68.72	67.35	75	45	31.8	45	12
18 H 100	2F	St	18	72.77	71.39	79	55	31.8	45	12
19 H 100	2F	St	19	76.81	75.44	83	60	31.8	45	14
20 H 100	2F	St	20	80.85	79.48	87	62	31.8	45	14
21 H 100	2F	St	21	84.89	83.52	91	65	31.8	45	14
22 H 100	2F	St	22	88.93	87.56	94	68	31.8	45	14
23 H 100	2F	St	23	92.98	91.61	102	72	31.8	45	14
24 H 100	2F	St	24	97.03	95.65	102	72	31.8	45	14
25 H 100	2F	St	25	101.06	99.69	112	72	31.8	45	14
26 H 100	2F	St	26	105.11	103.73	112	80	31.8	45	14
27 H 100	2F	St	27	109.15	107.78	120	80	31.8	45	14
28 H 100	2F	St	28	113.18	111.82	120	80	31.8	45	14
29 H 100	2F	St	29	117.23	115.86	120	80	31.8	45	14
30 H 100	2F	St	30	121.29	119.90	120	80	31.8	45	14
32 H 100	2F	St	32	129.36	127.99	128	80	31.8	45	14
33 H 100	2F	St	33	133.40	132.03	135	80	31.8	45	14
34 H 100	2F	St	34	137.45	136.07	142	80	31.8	45	14
35 H 100	2F	St	35	141.49	140.12	150	80	31.8	45	14
36 H 100	2F	St	36	145.54	144.16	158	80	31.8	45	14
38 H 100	2F	St	38	153.62	152.24	158	80	31.8	45	14
40 H 100	2F	St	40	161.70	160.33	168	80	31.8	45	14
44 H 100	2F	GG	44	177.88	176.50	184	80	31.8	50	18
45 H 100	2F	GG	45	181.91	180.54	192	80	31.8	50	18
48 H 100	2F	GG	48	194.03	192.67	200	90	31.8	50	18
50 H 100	4	GG	50	202.13	200.75		90	31.8	50	18
52 H 100	4	GG	52	210.21	208.84		90	31.8	50	18
58 H 100	4	GG	58	234.47	133.09		90	31.8	50	18
60 H 100	4	GG	60	242.55	241.18		100	31.8	50	18
70 H 100	4	GG	70	274.90	281.61		100	31.8	55	18
72 H 100	4	GG	72	282.98	289.69		120	31.8	55	18
84 H 100	4	GG	84	339.57	338.20		120	31.8	55	18
96 H 100	4	GG	96	388.09	386.71		120	31.8	60	18

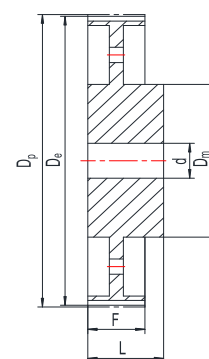

H150 with pilot bore

For belt width 1 1/2"



Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
14 H 150	2F	St	14	56.59	55.22	63	40	46	58	18
15 H 150	2F	St	15	60.64	29.27	70	45	46	58	18
16 H 150	2F	St	16	64.67	63.31	70	45	46	58	18
17 H 150	2F	St	17	68.72	67.35	75	45	46	58	18
18 H 150	2F	St	18	72.77	71.39	79	55	46	58	18
19 H 150	2F	St	19	76.81	75.44	83	60	46	58	18
20 H 150	2F	St	20	80.85	79.48	87	62	46	58	18
21 H 150	2F	St	21	84.89	83.52	91	65	46	58	18
22 H 150	2F	St	22	88.93	87.56	94	68	46	58	18
23 H 150	2F	St	23	92.98	91.61	102	72	46	58	18
24 H 150	2F	St	24	97.03	95.65	102	72	46	58	18
25 H 150	2F	St	25	101.06	99.69	112	72	46	58	18
26 H 150	2F	St	26	105.11	103.73	112	80	46	58	18
27 H 150	2F	St	27	109.15	107.78	120	80	46	58	18
28 H 150	2F	St	28	113.18	111.82	120	80	46	58	18
29 H 150	2F	St	29	117.23	115.86	120	80	46	58	18
30 H 150	2F	St	30	121.29	119.90	120	80	46	58	18
32 H 150	2F	St	32	129.36	127.99	128	80	46	58	18
33 H 150	2F	St	33	133.40	132.03	135	80	46	58	18
34 H 150	2F	St	34	137.45	136.07	142	80	46	58	18
35 H 150	2F	St	35	141.49	140.12	150	80	46	58	18
36 H 150	2F	St	36	145.54	144.16	158	80	46	58	18
38 H 150	2F	St	38	153.62	152.24	158	80	46	58	18
40 H 150	2F	St	40	161.70	160.33	168	80	46	58	18
44 H 150	2F	GG	44	177.88	176.50	184	80	46	58	18
45 H 150	2F	GG	45	181.91	180.54	192	80	46	58	18
48 H 150	2F	GG	48	194.03	192.67	200	90	46	65	18
50 H 150	4	GG	50	202.13	200.75		90	46	65	18
52 H 150	4	GG	52	210.21	208.84		90	46	65	18
58 H 150	4	GG	58	234.47	133.09		90	46	65	18
60 H 150	4	GG	60	242.55	241.18		100	46	65	24
70 H 150	4	GG	70	274.90	281.61		100	46	65	24
72 H 150	4	GG	72	282.98	289.69		120	46	65	24
84 H 150	4	GG	84	339.57	338.20		120	46	65	24
96 H 150	4	GG	96	388.09	386.71		120	46	65	24

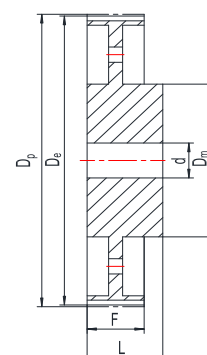

H200 with pilot bore

For belt width 2"


Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
14 H 200	2F	St	14	56.59	55.22	63	40	58.7	70	18
15 H 200	2F	St	15	60.64	29.27	70	45	58.7	70	18
16 H 200	2F	St	16	64.67	63.31	70	45	58.7	70	18
17 H 200	2F	St	17	68.72	67.35	75	45	58.7	70	18
18 H 200	2F	St	18	72.77	71.39	79	55	58.7	70	18
19 H 200	2F	St	19	76.81	75.44	83	60	58.7	70	18
20 H 200	2F	St	20	80.85	79.48	87	62	58.7	70	18
21 H 200	2F	St	21	84.89	83.52	91	65	58.7	70	18
22 H 200	2F	St	22	88.93	87.56	94	68	58.7	70	18
23 H 200	2F	St	23	92.98	91.61	102	72	58.7	70	18
24 H 200	2F	St	24	97.03	95.65	102	72	58.7	70	18
25 H 200	2F	St	25	101.06	99.69	112	72	58.7	70	18
26 H 200	2F	St	26	105.11	103.73	112	80	58.7	70	18
27 H 200	2F	St	27	109.15	107.78	120	80	58.7	70	18
28 H 200	2F	St	28	113.18	111.82	120	80	58.7	70	18
29 H 200	2F	St	29	117.23	115.86	120	80	58.7	70	18
30 H 200	2F	St	30	121.29	119.90	120	80	58.7	70	18
32 H 200	2F	St	32	129.36	127.99	128	80	58.7	70	18
33 H 200	2F	St	33	133.40	132.03	135	80	58.7	70	18
34 H 200	2F	St	34	137.45	136.07	142	80	58.7	70	18
35 H 200	2F	St	35	141.49	140.12	150	80	58.7	70	18
36 H 200	2F	St	36	145.54	144.16	158	80	58.7	70	18
38 H 200	2F	St	38	153.62	152.24	158	80	58.7	70	18
40 H 200	2F	St	40	161.70	160.33	168	80	58.7	70	18
44 H 200	2F	GG	44	177.88	176.50	184	80	58.7	70	18
45 H 200	2F	GG	45	181.91	180.54	192	80	58.7	70	18
48 H 200	2F	GG	48	194.03	192.67	200	90	58.7	75	24
50 H 200	4	GG	50	202.13	200.75		90	58.7	75	24
52 H 200	4	GG	52	210.21	208.84		90	58.7	75	24
58 H 200	4	GG	58	234.47	133.09		90	58.7	75	24
60 H 200	4	GG	60	242.55	241.18		100	58.7	75	24
70 H 200	4	GG	70	274.90	281.61		100	58.7	75	28
72 H 200	4	GG	72	282.98	289.69		120	58.7	75	28
84 H 200	4	GG	84	339.57	338.20		120	58.7	75	28
96 H 200	4	GG	96	388.09	386.71		120	58.7	75	28

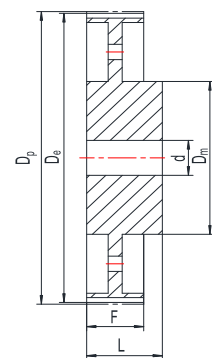


H300 with pilot bore

For belt width 3"

Part No.	Type	Mat.	Z	Dp	De	Df	Dm	F	L	d
14 H 300	2F	St	14	56.59	55.22	63	40	85.7	100	18
15 H 300	2F	St	15	60.64	29.27	70	45	85.7	100	18
16 H 300	2F	St	16	64.67	63.31	70	45	85.7	100	18
17 H 300	2F	St	17	68.72	67.35	75	45	85.7	100	18
18 H 300	2F	St	18	72.77	71.39	79	55	85.7	100	18
19 H 300	2F	St	19	76.81	75.44	83	60	85.7	100	18
20 H 300	2F	St	20	80.85	79.48	87	62	85.7	100	18
21 H 300	2F	St	21	84.89	83.52	91	65	85.7	100	18
22 H 300	2F	St	22	88.93	87.56	94	68	85.7	100	18
23 H 300	2F	St	23	92.98	91.61	102	72	85.7	100	18
24 H 300	2F	St	24	97.03	95.65	102	72	85.7	100	18
25 H 300	2F	St	25	101.06	99.69	112	72	85.7	100	18
26 H 300	2F	St	26	105.11	103.73	112	80	85.7	100	18
27 H 300	2F	St	27	109.15	107.78	120	80	85.7	100	18
28 H 300	2F	St	28	113.18	111.82	120	80	85.7	100	18
30 H 300	2F	St	30	121.29	119.90	120	80	85.7	100	18
32 H 300	2F	St	32	129.36	127.99	128	80	85.7	100	18
33 H 300	2F	St	33	133.40	132.03	135	80	85.7	100	18
34 H 300	2F	St	34	137.45	136.07	142	80	85.7	100	18
35 H 300	2F	St	35	141.49	140.12	150	80	85.7	100	18
36 H 300	2F	St	36	145.54	144.16	158	80	85.7	100	18
38 H 300	2F	St	38	153.62	152.24	158	80	85.7	100	18
40 H 300	2F	St	40	161.70	160.33	168	80	85.7	100	18
44 H 300	2F	GG	44	177.88	176.50	184	80	85.7	100	24
48 H 300	2F	GG	48	194.03	192.67	200	90	85.7	100	24
50 H 300	4	GG	50	202.13	200.75		90	85.7	100	24
58 H 300	4	GG	58	234.47	133.09		90	85.7	100	24
60 H 300	4	GG	60	242.55	241.18		100	85.7	100	24
72 H 300	4	GG	72	282.98	289.69		120	85.7	100	28
84 H 300	4	GG	84	339.57	338.20		120	85.7	100	28
96 H 300	4	GG	96	388.09	386.71		120	85.7	100	28
120 H 300	4	GG	120	485.12	483.72		120	85.7	100	28



(2F)



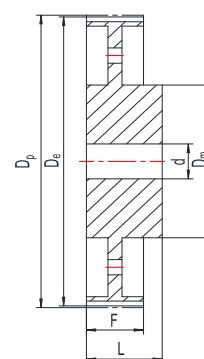


(4)

L050 with taper bore

For belt width 1/2"



Part No.	Type	Z	Bush	Dp	De	Df	Dm	F	L	R
TB 18 L 050	10F	18	1108	54.57	53.81	60	44	19	22	3
TB 19 L 050	10F	19	1108	57.16	56.84	63	44	19	22	3
TB 20 L 050	10F	20	1108	60.64	59.88	66	48	19	22	3
TB 21 L 050	10F	21	1108	63.67	62.91	71	48	19	22	3
TB 22 L 050	10F	22	1108	66.70	65.94	75	51	19	22	3
TB 23 L 050	10F	23	1108	69.73	68.97	79	54	19	22	3
TB 24 L 050	10F	24	1108	72.77	72.00	79	54	19	22	3
TB 25 L 050	10F	25	1108	75.80	75.04	83	56	19	22	3
TB 26 L 050	10F	26	1108	78.83	78.07	87	60	19	22	3
TB 27 L 050	10F	27	1108	81.86	81.10	87	62	19	22	3
TB 28 L 050	10F	28	1108	84.89	84.13	91	65	19	22	3
TB 30 L 050	10F	30	1108	90.96	90.20	97	70	19	22	3
TB 32 L 050	10F	32	1108	97.02	96.26	103	74	19	22	3
TB 36 L 050	10F	36	1108	109.15	108.39	115	85	19	22	3
TB 40 L 050	10F	40	1610	121.28	120.51	127	97	19	25	6
TB 48 L 050	11F	48	1610	145.53	144.77	152	88	19	25	6
TB 60 L 050	13	60	1610	181.91	181.15		92	19	25	3
TB 72 L 050	14	72	1610	218.30	217.53		92	19	25	3
TB 84 L 050	14	84	1610	254.68	253.90		92	19	25	3
TB 96 L 050	14	96	2012	291.06	290.30		106	19	32	6.5
TB 120 L 050	14	120	2012	363.83	363.07		106	19	32	6.5

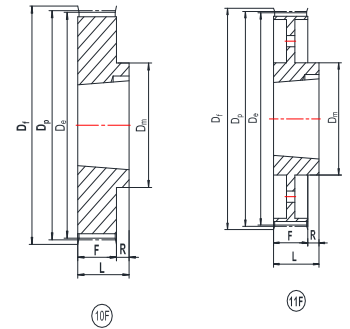

L075 with taper bore

For belt width 3/4"








Part No.	Type	Z	Bush	Dp	De	Df	Dm	F	L	R
TB 18 L 075	15F	18	1108	54.57	53.81	60		25	25	
TB 19 L 075	15F	19	1108	57.16	56.84	63		25	25	
TB 20 L 075	15F	20	1108	60.64	59.88	66		25	25	
TB 21 L 075	15F	21	1108	63.67	62.91	71		25	25	
TB 22 L 075	15F	22	1108	66.70	65.94	75		25	25	
TB 23 L 075	15F	23	1108	69.73	68.97	79		25	25	
TB 24 L 075	15F	24	1108	72.77	72.00	79		25	25	
TB 25 L 075	15F	25	1108	75.80	75.04	83		25	25	
TB 26 L 075	15F	26	1108	78.83	78.07	87		25	25	
TB 27 L 075	15F	27	1108	81.86	81.10	87		25	25	
TB 28 L 075	15F	28	1108	84.89	84.13	91		25	25	
TB 30 L 075	15F	30	1108	90.96	90.20	97		25	25	
TB 32 L 075	15F	32	1108	97.02	96.26	103		25	25	
TB 36 L 075	15F	36	1610	109.15	108.39	115		25	25	
TB 40 L 075	15F	40	1610	121.28	120.51	127		25	25	
TB 48 L 075	21F	48	1610	145.53	144.77	152	92	25	25	
TB 60 L 075	21	60	1610	181.91	181.15		92	25	25	
TB 72 L 075	22	72	1610	218.30	217.53		92	25	25	
TB 84 L 075	14	84	2012	254.68	253.90		106	25	32	3.5
TB 96 L 075	14	96	2012	291.06	290.30		106	25	32	3.5
TB 120 L 075	14	120	2012	363.83	363.07		106	25	32	3.5



L100 with taper bore

For belt width 1"








Part No.	Type	Z	Bush	Dp	De	Df	Dm	F	L	R
TB 18 L 100	16F	18	1108	54.57	53.81	60		32	22	10
TB 19 L 100	16F	19	1108	57.16	56.84	63		32	22	10
TB 20 L 100	16F	20	1108	60.64	59.88	66		32	22	10
TB 21 L 100	16F	21	1108	63.67	62.91	71		32	22	10
TB 22 L 100	16F	22	1108	66.70	65.94	75		32	22	10
TB 23 L 100	16F	23	1108	69.73	68.97	79		32	22	10
TB 24 L 100	16F	24	1108	72.77	72.00	79		32	22	10
TB 25 L 100	16F	25	1108	75.80	75.04	83		32	22	10
TB 26 L 100	16F	26	1108	78.83	78.07	87		32	22	10
TB 27 L 100	16F	27	1108	81.86	81.10	87		32	22	10
TB 28 L 100	16F	28	1108	84.89	84.13	91		32	25	10
TB 30 L 100	16F	30	1210	90.96	90.20	97		32	25	7
TB 32 L 100	16F	32	1210	97.02	96.26	103		32	25	7
TB 36 L 100	16F	36	1610	109.15	108.39	115		32	25	7
TB 40 L 100	16F	40	1610	121.28	120.51	127		32	25	7
TB 48 L 100	17F	48	1610	145.53	144.77	152	92	32	25	7
TB 60 L 100	19	60	1610	181.91	181.15		92	32	25	3.5
TB 72 L 100	22	72	2012	218.30	217.53		92	32	32	
TB 84 L 100	22	84	2012	254.68	253.90		106	32	32	
TB 96 L 100	22	96	2012	291.06	290.30		106	32	32	
TB 120 L 100	22	120	2012	363.83	363.07		106	32	32	



H100 with taper bore

For belt width 1"



Part No.	Type	Z	Bush	Dp	De	Df	Dm	F	L	R
TB 16 H 100	16F	16	1108	64.68	63.31	71		32	22	10
TB 18 H 100	16F	18	1210	72.77	71.39	79		32	25	7
TB 19 H 100	16F	19	1210	76.81	75.44	83		32	25	7
TB 20 H 100	16F	20	1210	80.55	79.48	87		32	25	7
TB 21 H 100	16F	21	1210	84.89	83.52	91		32	25	7
TB 22 H 100	16F	22	1210	88.94	87.56	93		32	25	7
TB 23 H 100	16F	23	1610	92.98	91.61	97		32	25	7
TB 24 H 100	16F	24	1610	97.02	95.65	103		32	25	7
TB 25 H 100	16F	25	1610	101.06	99.69	106		32	25	7
TB 26 H 100	16F	26	1610	105.11	103.73	111		32	25	7
TB 27 H 100	16F	27	1610	109.05	107.78	115		32	25	7
TB 28 H 100	16F	28	1610	113.19	111.82	119		32	25	7
TB 30 H 100	16F	30	1610	121.28	119.80	127		32	25	7
TB 32 H 100	17F	32	1610	129.36	127.99	135	90	32	25	7
TB 36 H 100	17F	36	1610	145.53	144.16	152	92	32	25	7
TB 40 H 100	17F	40	1610	161.70	160.33	168	92	32	25	7
TB 44 H 100	21F	44	2012	177.87	176.50	184	106	32	32	
TB 48 H 100	21F	48	2012	194.04	192.67	200	106	32	32	
TB 60 H 100	20	60	2012	242.55	241.18		106	32	32	1
TB 72 H 100	20	72	2012	291.06	289.69		106	32	32	1
TB 84 H 100	20	84	2012	339.57	338.20		106	32	32	1
TB 96 H 100	14	96	2517	388.08	386.71		119	32	45	5.5
TB 120H 100	14	120	2517	485.10	483.73		119	32	45	5.5



H150 with taper bore

For belt width 1 1/2"

Part No.	Type	Z	Bush	Dp	De	Df	Dm	F	L	R
TB 18 H 150	16F	18	1210	72.77	71.39	79		45	25	20
TB 19 H 150	16F	19	1210	76.81	75.44	83		45	25	20
TB 20 H 150	16F	20	1210	80.55	79.48	87		45	25	20
TB 21 H 150	16F	21	1210	84.89	83.52	91		45	25	20
TB 22 H 150	16F	22	1210	88.94	87.56	93		45	25	20
TB 23 H 150	16F	23	1610	92.98	91.61	97		45	25	20
TB 24 H 150	16F	24	1610	97.02	95.65	103		45	25	20
TB 25 H 150	16F	25	1610	101.06	99.69	106		45	25	20
TB 26 H 150	16F	26	1610	105.11	103.73	111		45	25	20
TB 27 H 150	16F	27	1610	109.05	107.78	115		45	25	20
TB 28 H 150	16F	28	1610	113.19	111.82	119		45	25	20
TB 30 H 150	16F	30	1610	121.28	119.80	127		45	25	20
TB 32 H 150	17F	32	1610	129.36	127.99	135	90	45	25	20
TB 36 H 150	17F	36	1610	145.53	144.16	152	92	45	25	20
TB 40 H 150	17F	40	1610	161.70	160.33	168	92	45	25	20
TB 44 H 150	17F	44	2012	177.87	176.50	184	106	45	32	13
TB 48 H 150	17F	48	2012	194.04	192.67	200	106	45	32	13
TB 60 H 150	20	60	2012	242.55	241.18		106	45	32	7
TB 72 H 150	20	72	2012	291.06	289.69		106	45	32	7
TB 84 H 150	20	84	2012	339.57	338.20		106	45	32	7
TB 96 H 150	20	96	2517	388.08	386.71		119	45	45	5.5



H200 with taper bore


For belt width 2"

Part No.	Type	Z	Bush	Dp	De	Df
----------	------	---	------	----	----	----

H300 with taper bore

For belt width 3"


Part No.	Type	Z	Bush	Dp	De	Df	Dm	F	L	R
TB 20 H 300	18F	20	1615	80.55	79.48	87		84	38	23
TB 21 H 300	18F	21	1615	84.89	83.52	91		84	38	23
TB 22 H 300	18F	22	1615	88.94	87.56	93		84	38	23
TB 23 H 300	18F	23	1615	92.98	91.61	97		84	38	23
TB 24 H 300	18F	24	1615	97.02	95.65	103		84	38	23
TB 25 H 300	18F	25	1615	101.06	99.69	106		84	38	23
TB 26 H 300	18F	26	1615	105.11	103.73	111		84	38	23
TB 27 H 300	18F	27	2012	109.05	107.78	115		84	32	26
TB 28 H 300	18F	28	2012	113.19	111.82	119		84	32	26
TB 30 H 300	18F	30	2012	121.28	119.80	127		84	32	26
TB 32 H 300	18F	32	2517	129.36	127.99	135		84	45	19.5
TB 36 H 300	18F	36	2517	145.53	144.16	152		84	45	19.5
TB 40 H 300	18F	40	2517	161.70	160.33	168		84	45	19.5
TB 44 H 300	19F	44	2517	177.87	176.50	184	119	84	45	20.5
TB 48 H 300	19F	48	2517	194.04	192.67	200	119	84	45	20.5
TB 60 H 300	20	60	2517	242.55	241.18		119	84	45	20.5
TB 72 H 300	20	72	2517	291.06	289.69		119	84	45	20.5
TB 84 H 300	20	84	2517	339.57	338.20		119	84	45	20.5
TB 96 H 300	20	96	3030	388.08	386.71		150	84	76	5

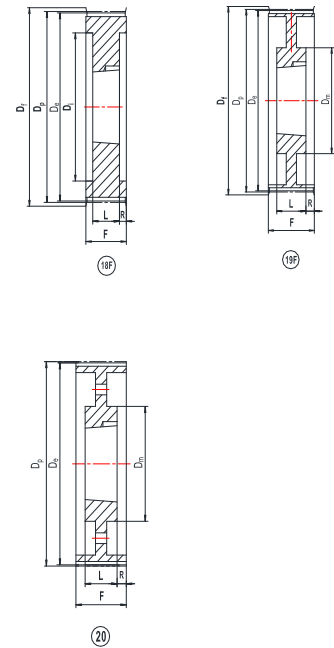

T5-21

For belt width 10mm

Part No.	Type	Z	De	Df	Dm	F	L	d
10 T5-21	2F	10	15.05	19.5	8	15	21	–
12 T5-21	2F	12	18.25	23	10	15	21	–
14 T5-21	2F	14	21.45	25	13	15	21	–
15 T5-21	2F	15	23.05	28	16	15	21	–
16 T5-21	2F	16	24.60	32	18	15	21	–
18 T5-21	2F	18	27.80	32	20	15	21	–
19 T5-21	2F	19	29.40	36	22	15	21	–
20 T5-21	2F	20	31.00	36	23	15	21	–
22 T5-21	2F	22	34.25	38	24	15	21	–
24 T5-21	2F	24	37.40	42	26	15	21	–
25 T5-21	2F	25	38.95	44	26	15	21	–
26 T5-21	2F	26	40.60	44	26	15	21	–
27 T5-21	2F	27	42.20	48	30	15	21	8
28 T5-21	2F	28	43.75	48	32	15	21	8
30 T5-21	2F	30	46.95	51	34	15	21	8
32 T5-21	2F	32	50.10	54	38	15	21	8
36 T5-21	2F	36	56.45	63	38	15	21	8
40 T5-21	2F	40	62.85	66	40	15	21	8
42 T5-21	2F	42	66.00	71	40	15	21	8
44 T5-21	2	44	69.20	–	45	15	21	8
48 T5-21	2	48	75.55	–	50	15	21	8
60 T5-21	2	60	94.65	–	65	15	21	8

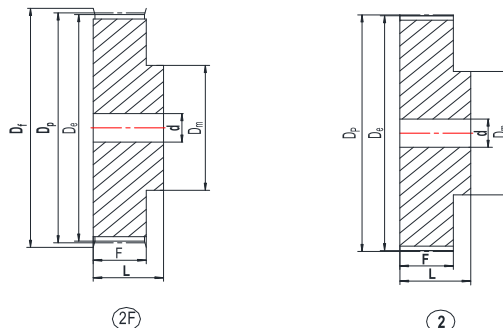

T5-27


For belt width 16mm

Part No.	Type	Z	De	Df	Dm	F	L	d
10 T5-27	2F	10	15.05	19.5	8	21	27	–
12 T5-27	2F	12	18.25	23	10	21	27	–
14 T5-27	2F	14	21.45	25	13	21	27	–
15 T5-27	2F	15	23.05	28	16	21	27	–
16 T5-27	2F	16	24.60	32	18	21	27	–
18 T5-27	2F	18	27.80	32	20	21	27	–
19 T5-27	2F	19	29.40	36	22	21	27	–
20 T5-27	2F	20	31.00	36	23	21	27	–
22 T5-27	2F	22	34.25	38	24	21	27	–
24 T5-27	2F	24	37.40	42	26	21	27	–
25 T5-27	2F	25	38.95	44	26	21	27	–
26 T5-27	2F	26	40.60	44	26	21	27	–
27 T5-27	2F	27	42.20	48	30	21	27	8
28 T5-27	2F	28	43.75	48	32	21	27	8
30 T5-27	2F	30	46.95	51	34	21	27	8
32 T5-27	2F	32	50.10	54	38	21	27	8
36 T5-27	2F	36	56.45	63	38	21	27	8
40 T5-27	2F	40	62.85	66	40	21	27	8
42 T5-27	2F	42	66.00	71	40	21	27	8
44 T5-27	2	44	69.20	–	45	21	27	8
48 T5-27	2	48	75.55	–	50	21	27	8
60 T5-27	2	60	94.65	–	65	21	27	8

T5-36

For belt width 25mm

Part No.	Type	Z	De	Df	Dm	F	L	d
10 T5-36	2F	10	15.05	20	8	30	36	—
12 T5-36	2F	12	18.25	23	10	30	36	—
14 T5-36	2F	14	21.45	25	13	30	36	—
15 T5-36	2F	15	23.05	28	16	30	36	—
16 T5-36	2F	16	24.60	32	18	30	36	—
18 T5-36	2F	18	27.80	32	20	30	36	—
19 T5-36	2F	19	29.40	36	22	30	36	—
20 T5-36	2F	20	31.00	36	23	30	36	—
22 T5-36	2F	22	34.25	38	24	30	36	—
24 T5-36	2F	24	37.40	42	26	30	36	—
25 T5-36	2F	25	38.95	44	26	30	36	—
26 T5-36	2F	26	40.60	44	26	30	36	—
27 T5-36	2F	27	42.20	48	30	30	36	8
28 T5-36	2F	28	43.75	48	32	30	36	8
30 T5-36	2F	30	46.95	51	34	30	36	8
32 T5-36	2F	32	50.10	54	38	30	36	8
36 T5-36	2F	36	56.45	63	38	30	36	8
40 T5-36	2F	40	62.85	66	40	30	36	8
42 T5-36	2F	42	66.00	71	40	30	36	8
44 T5-36	2	44	69.20	—	45	30	36	8
48 T5-36	2	48	75.55	—	50	30	36	8
60 T5-36	2	60	94.65	—	65	30	36	8

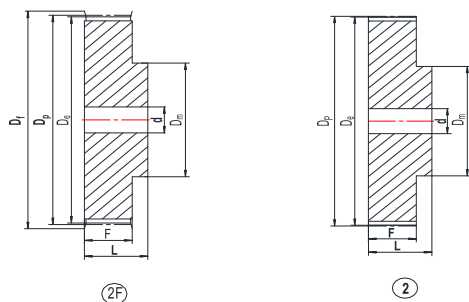

T10-31

For belt width 16mm

Part No.	Type	Z	De	Df	Dm	F	L	d
12 T10-31	2F	12	36.35	42	28	21	31	6
14 T10-31	2F	14	42.70	48	32	21	31	8
15 T10-31	2F	15	45.90	51	32	21	31	8
16 T10-31	2F	16	49.10	54	35	21	31	8
18 T10-31	2F	18	55.45	60	40	21	31	8
19 T10-31	2F	19	58.65	66	44	21	31	8
20 T10-31	2F	20	61.80	66	46	21	31	8
22 T10-31	2F	22	68.20	75	52	21	31	8
24 T10-31	2F	24	74.55	83	58	21	31	8
25 T10-31	2F	25	77.75	83	60	21	31	8
26 T10-31	2F	26	80.90	87	60	21	31	8
27 T10-31	2F	27	84.10	91	60	21	31	8
28 T10-31	2F	28	87.25	93	60	21	31	8
30 T10-31	2F	30	93.65	97	60	21	31	8
32 T10-31	2F	32	100.00	106	65	21	31	10
36 T10-31	2F	36	112.75	119	70	21	31	10
40 T10-31	2F	40	125.45	131	80	21	31	10
44 T10-31	2	44	138.20	–	88	21	31	10
48 T10-31	2	48	150.95	–	95	21	31	16
60 T10-31	2	60	189.15	–	110	21	31	16

T10-40

For belt width 25mm

Part No.	Type	Z	De	Df	Dm	F	L	d
12 T10-40	2F	12	36.35	42	28	30	40	6
14 T10-40	2F	14	42.70	48	32	30	40	8
15 T10-40	2F	15	45.90	51	32	30	40	8
16 T10-40	2F	16	49.10	54	35	30	40	8
18 T10-40	2F	18	55.45	60	40	30	40	8
19 T10-40	2F	19	58.65	66	44	30	40	8
20 T10-40	2F	20	61.80	66	46	30	40	8
22 T10-40	2F	22	68.20	75	52	30	40	8
24 T10-40	2F	24	74.55	83	58	30	40	8
25 T10-40	2F	25	77.75	83	60	30	40	8
26 T10-40	2F	26	80.90	87	60	30	40	8
27 T10-40	2F	27	84.10	91	60	30	40	8
28 T10-40	2F	28	87.25	93	60	30	40	8
30 T10-40	2F	30	93.65	97	60	30	40	8
32 T10-40	2F	32	100.00	106	65	30	40	10
36 T10-40	2F	36	112.75	119	70	30	40	10
40 T10-40	2F	40	125.45	131	80	30	40	10
44 T10-40	2	44	138.20	–	88	30	40	10
48 T10-40	2	48	150.95	–	95	30	40	16
60 T10-40	2	60	189.15	–	110	30	40	16

T10-47

For belt width 32mm

Part No.	Type	Z	De	Df	Dm	F	L	d
18 T10-47	2F	18	55.45	60	40	37	47	10
19 T10-47	2F	19	58.65	66	44	37	47	10
20 T10-47	2F	20	61.80	66	46	37	47	12
22 T10-47	2F	22	68.20	75	52	37	47	12
24 T10-47	2F	24	74.55	83	58	37	47	12
25 T10-47	2F	25	77.75	83	60	37	47	12
26 T10-47	2F	26	80.90	87	60	37	47	12
27 T10-47	2F	27	84.10	91	60	37	47	12
28 T10-47	2F	28	87.25	93	60	37	47	12
30 T10-47	2F	30	93.65	97	60	37	47	12
32 T10-47	2F	32	100.00	106	65	37	47	12
36 T10-47	2F	36	112.75	119	70	37	47	16
40 T10-47	2F	40	125.45	131	80	37	47	16
44 T10-47	2	44	138.20	–	88	37	47	16
48 T10-47	2	48	150.95	–	95	37	47	16
60 T10-47	2	60	189.15	–	110	37	47	16

T10-66


For belt width 50mm

Part No.	Type	Z	De	Df	Dm	F	L	d
18 T10-66	2F	18	55.45	60	40	56	66	10
19 T10-66	2F	19	58.65	66	44	56	66	10
20 T10-66	2F	20	61.80	66	46	56	66	12
22 T10-66	2F	22	68.20	75	52	56	66	12
24 T10-66	2F	24	74.55	83	58	56	66	12
25 T10-66	2F	25	77.75	83	60	56	66	12
26 T10-66	2F	26	80.90	87	60	56	66	12
27 T10-66	2F	27	84.10	91	60	56	66	12
28 T10-66	2F	28	87.25	93	60	56	66	12
30 T10-66	2F	30	93.65	97	60	56	66	12
32 T10-66	2F	32	100.00	106	65	56	66	12
36 T10-66	2F	36	112.75	119	70	56	66	16
40 T10-66	2F	40	125.45	131	80	56	66	16
44 T10-66	2	44	138.20	–	88	56	66	16
48 T10-66	2	48	150.95	–	95	56	66	16
60 T10-66	2	60	189.15	–	110	56	66	16


AT5-21

For belt width 10mm

Part No.	Type	Z	De	Df	Dm	F	L	d
12 AT5-21	2F	12	17.85	23	10	15	21	–
14 AT5-21	2F	14	21.05	25	13	15	21	–
15 AT5-21	2F	15	22.65	28	16	15	21	–
16 AT5-21	2F	16	24.20	32	18	15	21	–
18 AT5-21	2F	18	27.40	32	20	15	21	–
19 AT5-21	2F	19	29.00	36	22	15	21	–
20 AT5-21	2F	20	30.60	36	23	15	21	–
22 AT5-21	2F	22	33.85	38	24	15	21	–
24 AT5-21	2F	24	37.00	42	26	15	21	–
25 AT5-21	2F	25	38.55	44	26	15	21	–
26 AT5-21	2F	26	40.20	44	26	15	21	–
27 AT5-21	2F	27	41.80	48	30	15	21	8
28 AT5-21	2F	28	43.35	48	32	15	21	8
30 AT5-21	2F	30	46.55	51	34	15	21	8
32 AT5-21	2F	32	49.70	54	38	15	21	8
36 AT5-21	2F	36	56.05	63	38	15	21	8
40 AT5-21	2F	40	62.45	66	40	15	21	8
42 AT5-21	2F	42	65.60	71	40	15	21	8
44 AT5-21	2	44	68.80	–	45	15	21	8
48 AT5-21	2	48	75.15	–	50	15	21	8
60 AT5-21	2	60	94.25	–	65	15	21	8



(2F)



(2)

AT5-27

For belt width 16mm

Part No.	Type	Z	De	Df	Dm	F	L	d
12 AT5-27	2F	12	17.85	23	10	21	27	–
14 AT5-27	2F	14	21.05	25	13	21	27	–
15 AT5-27	2F	15	22.65	28	16	21	27	–
16 AT5-27	2F	16	24.20	32	18	21	27	–
18 AT5-27	2F	18	27.40	32	20	21	27	–
19 AT5-27	2F	19	29.00	36	22	21	27	–
20 AT5-27	2F	20	30.60	36	23	21	27	–
22 AT5-27	2F	22	33.85	38	24	21	27	–
24 AT5-27	2F	24	37.00	42	26	21	27	–
25 AT5-27	2F	25	38.55	44	26	21	27	–
26 AT5-27	2F	26	40.20	44	26	21	27	8
27 AT5-27	2F	27	41.80	48	30	21	27	8
28 AT5-27	2F	28	43.35	48	32	21	27	8
30 AT5-27	2F	30	46.55	51	34	21	27	8
32 AT5-27	2F	32	49.70	54	38	21	27	8
36 AT5-27	2F	36	56.05	63	38	21	27	8
40 AT5-27	2F	40	62.45	66	40	21	27	8
42 AT5-27	2F	42	65.60	71	40	21	27	8
44 AT5-27	2	44	68.80	–	45	21	27	8
48 AT5-27	2	48	75.15	–	50	21	27	8
60 AT5-27	2	60	94.25	–	65	21	27	8


AT5-36

For belt width 25mm


Part No.	Type	Z	De	Df	Dm	F	L	d
12 AT5-36	2F	12	17.85	23	10	30	36	–
14 AT5-36	2F	14	21.05	25	13	30	36	–
15 AT5-36	2F	15	22.65	28	16	30	36	–
16 AT5-36	2F	16	24.20	32	18	30	36	–
18 AT5-36	2F	18	27.40	32	20	30	36	–
19 AT5-36	2F	19	29.00	36	22	30	36	–
20 AT5-36	2F	20	30.60	36	23	30	36	–
22 AT5-36	2F	22	33.85	38	24	30	36	–
24 AT5-36	2F	24	37.00	42	26	30	36	8
25 AT5-36	2F	25	38.55	44	26	30	36	8
26 AT5-36	2F	26	40.20	44	26	30	36	8
27 AT5-36	2F	27	41.80	48	30	30	36	8
28 AT5-36	2F	28	43.35	48	32	30	36	8
30 AT5-36	2F	30	46.55	51	34	30	36	8
32 AT5-36	2F	32	49.70	54	38	30	36	8
36 AT5-36	2F	36	56.05	63	38	30	36	8
40 AT5-36	2F	40	62.45	66	40	30	36	8
42 AT5-36	2F	42	65.60	71	40	30	36	8
44 AT5-36	2	44	68.80	–	45	30	36	8
48 AT5-36	2	48	75.15	–	50	30	36	8
60 AT5-36	2	60	94.25	–	65	30	36	8

AT10-31 For belt width 16mm

Part No.	Type	Z	De	Df	Dm	F	L	d
15 AT10-31	2F	15	45.90	51	32	21	31	8
16 AT10-31	2F	16	49.10	54	35	21	31	8
18 AT10-31	2F	18	55.45	60	40	21	31	8
19 AT10-31	2F	19	58.65	66	44	21	31	8
20 AT10-31	2F	20	61.80	66	46	21	31	8
22 AT10-31	2F	22	68.20	75	52	21	31	8
24 AT10-31	2F	24	74.55	83	58	21	31	8
25 AT10-31	2F	25	77.75	83	60	21	31	8
26 AT10-31	2F	26	80.90	87	60	21	31	8
27 AT10-31	2F	27	84.10	91	60	21	31	8
28 AT10-31	2F	28	87.25	93	60	21	31	8
30 AT10-31	2F	30	93.65	97	60	21	31	8
32 AT10-31	2F	32	100.00	106	65	21	31	10
36 AT10-31	2F	36	112.75	119	70	21	31	10
40 AT10-31	2F	40	125.45	131	80	21	31	10
44 AT10-31	2	44	138.20	–	88	21	31	10
48 AT10-31	2	48	150.95	–	95	21	31	16
60 AT10-31	2	60	189.15	–	110	21	31	16



(2F)



(2)

AT10-40 For belt width 25mm

Part No.	Type	Z	De	Df	Dm	F	L	d
15 AT10-40	2F	15	45.90	51	32	30	40	8
16 AT10-40	2F	16	49.10	54	35	30	40	8
18 AT10-40	2F	18	55.45	60	40	30	40	8
19 AT10-40	2F	19	58.65	66	44	30	40	8
20 AT10-40	2F	20	61.80	66	46	30	40	8
22 AT10-40	2F	22	68.20	75	52	30	40	8
24 AT10-40	2F	24	74.55	83	58	30	40	8
25 AT10-40	2F	25	77.75	83	60	30	40	8
26 AT10-40	2F	26	80.90	87	60	30	40	8
27 AT10-40	2F	27	84.10	91	60	30	40	8
28 AT10-40	2F	28	87.25	93	60	30	40	8
30 AT10-40	2F	30	93.65	97	60	30	40	8
32 AT10-40	2F	32	100.00	106	65	30	40	10
36 AT10-40	2F	36	112.75	119	70	30	40	10
40 AT10-40	2F	40	125.45	131	80	30	40	10
44 AT10-40	2	44	138.20	–	88	30	40	10
48 AT10-40	2	48	150.95	–	95	30	40	16
60 AT10-40	2	60	189.15	–	110	30	40	16

AT10-47 For belt width 32mm

Part No.	Type	Z	De	Df	Dm	F	L	d
18 AT10-47	2F	18	55.45	60	40	37	47	10
19 AT10-47	2F	19	58.65	66	44	37	47	10
20 AT10-47	2F	20	61.80	66	46	37	47	12
22 AT10-47	2F	22	68.20	75	52	37	47	12
24 AT10-47	2F	24	74.55	83	58	37	47	12
25 AT10-47	2F	25	77.75	83	60	37	47	12
26 AT10-47	2F	26	80.90	87	60	37	47	12
27 AT10-47	2F	27	84.10	91	60	37	47	12
28 AT10-47	2F	28	87.25	93	60	37	47	12
30 AT10-47	2F	30	93.65	97	60	37	47	12
32 AT10-47	2F	32	100.00	106	65	37	47	12
36 AT10-47	2F	36	112.75	119	70	37	47	16
40 AT10-47	2F	40	125.45	131	80	37	47	16
44 AT10-47	2	44	138.20	–	88	37	47	16
48 AT10-47	2	48	150.95	–	95	37	47	16
60 AT10-47	2	60	189.15	–	110	37	47	16

AT10-66 For belt width 50mm

Part No.	Type	Z	De	Df	Dm	F	L	d
18 AT10-66	2F	18	55.45	60	40	56	66	10
19 AT10-66	2F	19	58.65	66	44	56	66	10
20 AT10-66	2F	20	61.80	66	46	56	66	12
22 AT10-66	2F	22	68.20	75	52	56	66	12
24 AT10-66	2F	24	74.55	83	58	56	66	12
25 AT10-66	2F	25	77.75	83	60	56	66	12
26 AT10-66	2F	26	80.90	87	60	56	66	12
27 AT10-66	2F	27	84.10	91	60	56	66	12
28 AT10-66	2F	28	87.25	93	60	56	66	12
30 AT10-66	2F	30	93.65	97	60	56	66	12
32 AT10-66	2F	32	100.00	106	65	56	66	12
36 AT10-66	2F	36	112.75	119	70	56	66	16
40 AT10-66	2F	40	125.45	131	80	56	66	16
44 AT10-66	2	44	138.20	–	88	56	66	16
48 AT10-66	2	48	150.95	–	95	56	66	16
60 AT10-66	2	60	189.15	–	110	56	66	16